

ELETTRINVERTER® LOGICA BEGHELLI




230V-50Hz
Tc 50°C
ta 0÷40°C

Beghelli




334.900.489

www.beghelli.com
BEGHELLI S.p.A. - Via Mozzeghine 13/15 - 40050 MONTEVEGLIO (BO) - Tel. 051 9660411 - Fax 051 9660444

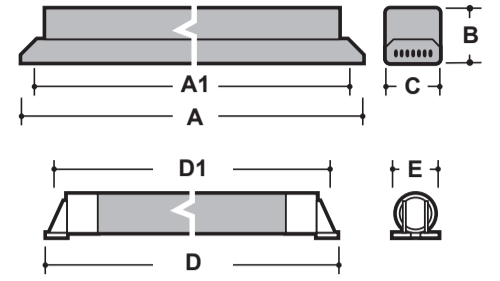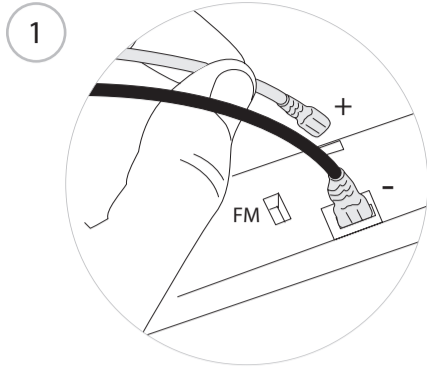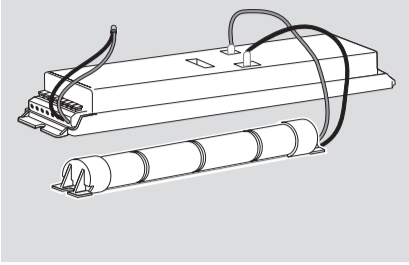


cod. ord.	A	A1	B	C	D	D1	E
12126	330	320	28	30	335	325	28


2

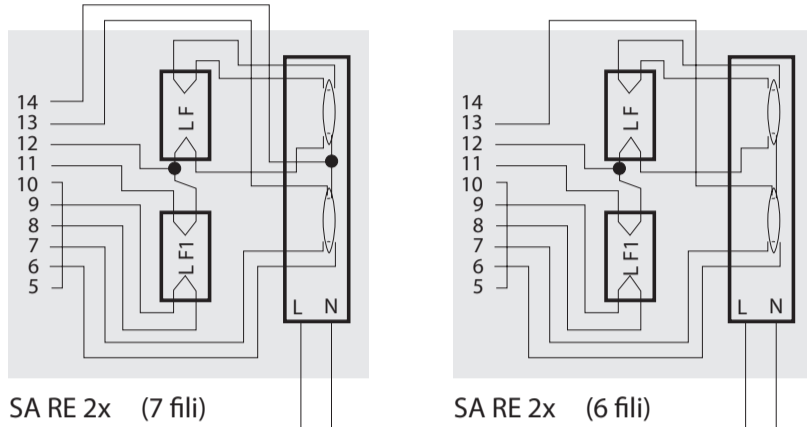

Attenzione:
Gli schemi a fianco sono validi solo per reattori elettronici con autoripristino.

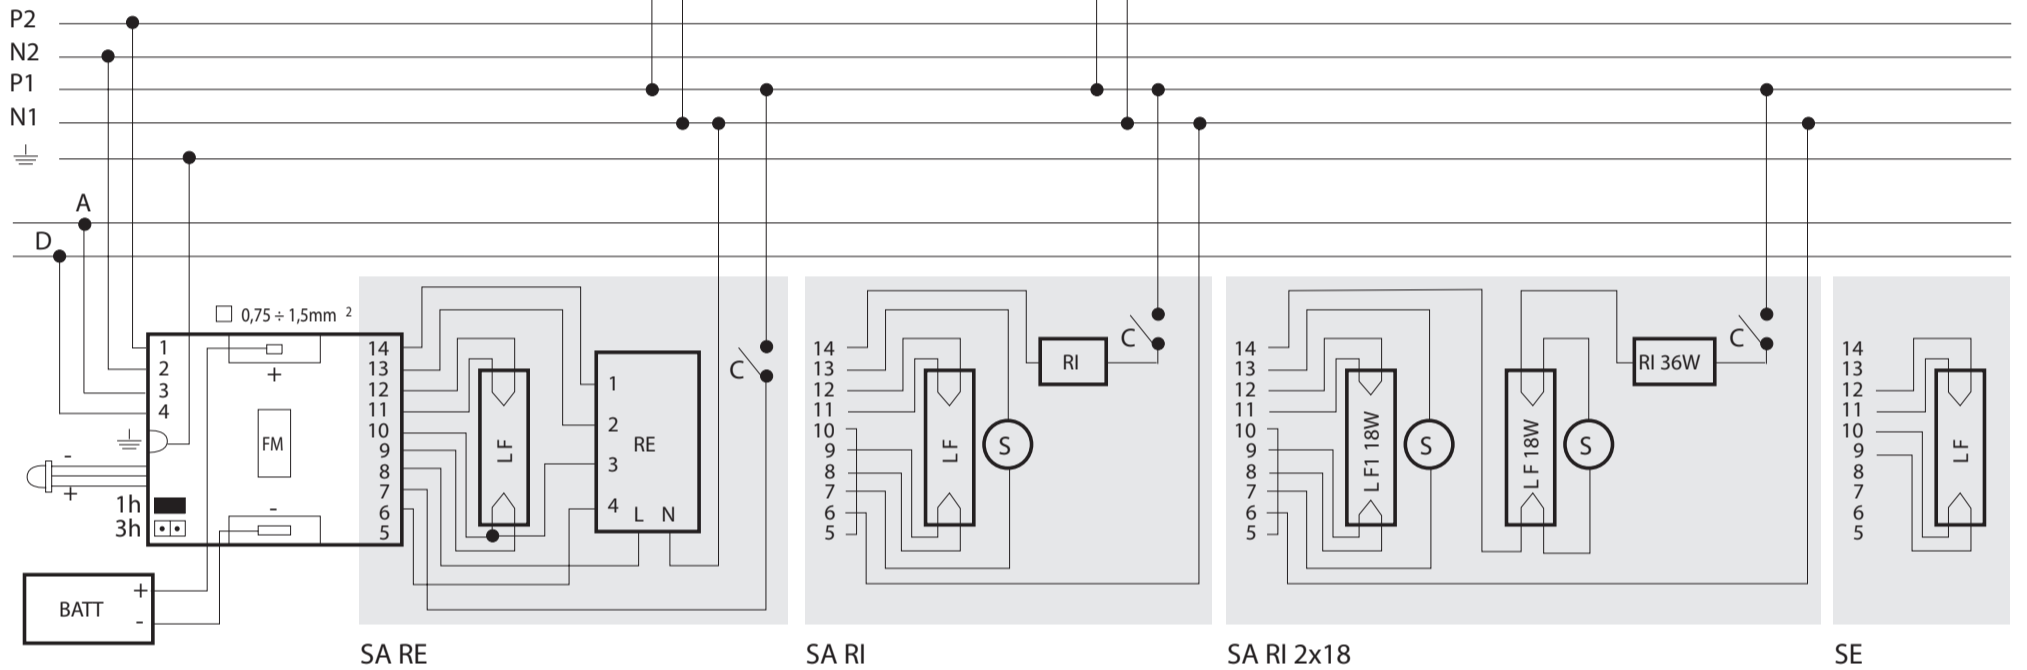

3

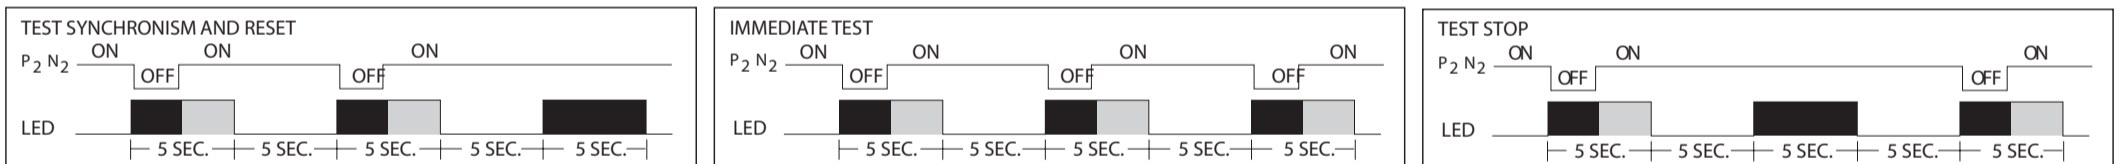

■ RED ■ YELLOW

Order Code	I~	COS.	FD 14÷80W G5	FD 24÷55W 2G11	FD 18÷58W G13	14W	21W	24W	28W	35W	39W	49W	54W	80W										
12126	45mA	0,5	NiCd 7,2V 2,2Ah	65%	1h	42%	1h	41%	1h	28%	1h	21%	1h	25%	1h	15%	1h	13%	1h	8%	1h			
				22%	3h	15%	3h	10%	3h															
				24W	36W	40W	55W																	
				41%	1h	24%	1h	19%	1h	9%	1h													
				10%	3h	6%	3h	5%	3h															
				18W	36W	58W																		
				48%	1h	24%	1h	14%	1h															
				15%	3h	6%	3h	3%	3h															

ELEKTRO INVERTER LOGICA

P2-N2 = Přímé vedení
P1-N1 = Kumulované vedení
LF = Lineární zářivka
LF1 = Nouzový zdroj
DA = Komunikační BUS
RE = Elektronický předřadník
RI = Reattore induttivo
FM = Rádiový modul

Pro správnou funkci v SA režimu, musí být zapojeno P2-N2 vedení.

Kontaktujte svého autorizovaného prodejce pro bližší instrukce o zapojení elektro invertoru.

NÁVOD K INSTALACI

Umístěte baterii co nejdále od teplo vyzařujících součástek (jako například předřadník).

SCHÉMA ZAPOJENÍ

(Fig. 2) SE - Nouzové svítící
SA - Stále svítící
C = Světelný vypínač

NÁVOD K POUŽITÍ

(Fig. 3) FUNKČNÍ TEST= každých 28 týdnů
TEST SAMOSTATNOSTI= každých 26 týdnů
Sudá svítidla provádějí test autonomie 1 týden po lichých svítidlech.
(0,2,...,8,A,C,E)= sudá; (1,3,...,9,B,D,F)= lichá.
Chcete-li aktivovat funkce uvedené na schématech, zapněte a vypněte napájení, svítí-li červená dioda.

LED SIGNALIZACE
STÁLE SVÍTÍCI ZELENÁ NORMÁLNÍ FUNKCE
BLIKAJÍCÍ ZELENÁ NABÍJENÍ AKUMULÁTORU
JEDNA ČERVENÉ BLIKAJÍCÍ PORUCHA AUTONOMIE, BATERIE

DVĚ ČERVENÉ BLIKAJÍCÍ

PORUCHA ZÁŘIVKOVÉ TRUBICE

TŘÍ ORANŽOVÉ BLIKAJÍCÍ

PORUCHA SYNCHRONIZACE

TECHNICKÁ SPECIFIKACE

• Nominální exit frekvence: s trubici 30 kHz
• Monitor LED signalizace
• Nabíjecí čas: 12 hodin

VAROVÁNÍ - ZÁRUKA

- Zařízení musí být použito výlučně pro účel, pro který je určeno. Každé jiné použití je považováno za nesprávné a proto nebezpečné.
- Před zahájením údržby, čištění nebo opravy odpojte zaří-

zení ze sítě.

- Výrobek nelze likvidovat jako netříděný komunální odpad. Musí být odevzdán zvlášť k likvidaci.

- Výrobky Beghelli podléhají příslušným zákonům na ochranu duševního vlastnictví.

- V případě výměny baterií kontaktujte autorizované technické servisní středisko a v případě jiných nezbytných oprav používejte pouze originální náhradní díly. Nerespektováním uvedených požadavků může dojít ke snížení bezpečnosti tohoto zařízení.

ELECTRONIC EMERGENCY LIGHTING CONVERSION KIT

It is designed to be mounted inside ceiling appliances or in a suitable case at a maximum distance of 2 meters. The duration and luminous flux during the emergency mode are automatically adapted to the fluorescent tube.

INSTRUCTIONS FOR INSTALLATION

Place the battery pack as far as you can from the heating sources (such as the ballast).

WIRING DIAGRAMS

(Fig. 2) SE - Non maintained
SA - Maintained
C = Light switch

P2-N2 = Direct line

P1-N1 = Switched line

LF = Fluorescent lamp

LF1 = Lamp operating in emergency

DA = communication bus

RE = Electronic Ballast

RI = Inductive feeder

FM = Radio module connection

For the corrected operation in SA mode, line P2-N2 must be present.

Contact your local authorised dealer for the connection instructions of Beghelli electro-inverters to the main models of electronic reactors.

INSTRUCTIONS FOR USE

(Fig. 3) FUNCTIONAL TEST= every 28 days

DURATION TEST= every 26 weeks

Even lamps carry out the autonomy test 1 week after the odd lamps.

(0,2,...,8,A,C,E)= even; (1,3,...,9,B,D,F)= odd.

To perform the functions shown on the diagrams turn on and off the power when the red LED is lit.

LED SIGNALS
FIXED GREEN NORMAL FUNCTION
FLASHING GREEN CHARGING BATTERY
ONE RED FLASH DURATION ERROR
BATTERY MALFUNCTION

TWO RED FLASHES

MALFUNCTION FLUORESCENT LAMP

THREE ORANGE FLASHES TEST SYNCHRONISATION FAILURE

TECHNICAL SPECIFICATIONS

• Nominal exit frequency: with tube 30kHz
• Monitor LED to indicate mains-on condition
• Recharging time: 12 hours

WARNINGS - GUARANTEE

- This device shall be used exclusively for the purpose for which it has been designed.
Any other use is considered improper and therefore dangerous.
- Disconnect the device from the mains before starting to

clean or service it.

- Warning: this product contains materials that may be harmful if dispersed into the environment.

- Beghelli's products are subject to the applicable laws on intellectual property.

- Contact an authorised technical service centre for the replacement of batteries and for any other repairs possibly required use only original spare parts. The lack of respect of the above conditions may compromise the safety of the device.

- For details regarding warranty services, contact an authorized dealer.

