

Completa

emergency



- With enclosure
IP40
- With enclosure
IK07
- IP66**
- IK09**
- 850°**
-
- +40°C**
0°C
- +45°C**
-10°C



Adjustable autonomy from 1 to 8 hrs. **IK09** rating with optional IP66 enclosure, with a **mechanical resistance up to 5 times greater than that of a standard luminaire.**



The extensive range of accessories allows one luminaire to be used for recessed, ceiling, edge mounting and plasterboard applications. IP66 IK09 enclosure for harsh environments.



Recessed mounting with separated body of the diffuser/re-reflector unit, which remains integrated with the electronics and can be quickly installed in the recessed box provided.

Applications

Industry, services, civil sector

Characteristics

Power supply

230Vac ± 10%, 50÷60Hz

Mounting: Wall, ceiling, recessed, false ceiling, edge mounting and wall signage


Recharging time 12hrs

Housing Polycarbonate, white RAL 9003

Optics Symmetrical, white

Screen Clear polycarbonate

Compliance EN 60598-1, EN 60598-2-2, EN 60598-2-22, UNI EN 1838, UNI 11222, EN 62034

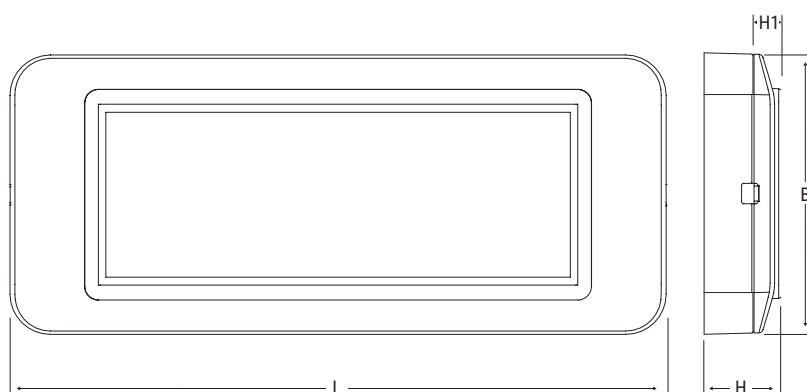


Dimensions mm				Distance of visibility (DV)	
L	B	H	H1	Wall	Edge mounting
CEILING					
294	126	34	-	15m	20m
RECESSED					
292	124	35	12	15m	20m
IP65 ENCLOSURE					
317	149	46	-	15m	20m

Performance according to EN 1838

Height (m)	Centre distance (m) ESCAPE ROUTES		Illuminated surface area (m) LARGE AREAS	
	Wall	Ceiling	Wall	Ceiling
2.5	6	-	4x6	-
3	-	11	-	8x8
Lighting >1lx at floor level along the centre line without reflections Emax/Emin <40			Lighting >0.5lx at floor level without reflections Emax/Emin <40	
Performance with reference to luminaire Order Code 4108N 240 lm			Maintenance coefficient 0.8	

COMPLETA



■ C90-C270

■ C0-C180


	Order code	W eq.	Description	Version	Autonomy h	Flux SE lm	Flux SA lm	Input power		Note
								DC	AC	
TR	4101N	8	COMPLETA LED 8W SE 1/3	SE	1/3	150/70	-	1.1W		
	4102N	11	COMPLETA LED 11W SE 1/3	SE	1/3	200/80	-	1.1W		
	4103N	24	COMPLETA LED 24W SE 1/3	SE	1/3	500/180	-	1.1W		
	4105N	24	COMPLETA LED 24W SA 1/3	SE/SA	1/3	500/180	160	2.5W		
	4108N	36	COMPLETA LED 36W SE 1/3	SE	1/3	700/240	-	1.1W		
	4110N	36	COMPLETA LED 36W SA 1/3	SE/SA	1/3	700/240	160	2.5W		
AT	4210	8	COMPLETA LED 8W AT SE	SE	1/1.5/2/3/8	200/140/110/80/35	-	1.5W		
	4211	24	COMPLETA LED 24W AT SE	SE	1/1.5/2/3/8	450/300/230/160/70	-	1.5W		
	4213	24	COMPLETA LED 24W AT SA	SE/SA	1/1.5/2/3/8	450/300/230/160/70	250	4.5W		
	4212	36	COMPLETA LED 36W AT SE	SE	1/1.5/2/3/8	700/470/360/250/100	-	1.5W		
	4214	36	COMPLETA LED 36W AT SA	SE/SA	1/1.5/2/3/8	700/470/360/250/100	250	4.5W		
CT	4200	8	COMPLETA LED 8W CT SE	SE	1/1.5/2/3/8	150/100/75/55/25	-	4.5W		
	4201	11	COMPLETA LED 11W CT SE	SE	1/1.5/2/3/8	250/170/130/85/35	-	4.5W		
	4202	24	COMPLETA LED 24W CT SE	SE	1/1.5/2/3/8	450/305/230/156/65	-	4.5W		
	4203	11	COMPLETA LED 11W CT SA	SE/SA	1/1.5/2/3/8	250/170/130/85/35	250	7.5W		
	4204	24	COMPLETA LED 24W CT SA	SE/SA	1/1.5/2/3/8	450/305/230/156/65	250	7.5W		
	4205	36	COMPLETA LED 36W CT SE	SE	1/1.5/2/3/8	700/470/360/250/100	-	4.5W		
	4206	36	COMPLETA LED 36W CT SA	SE/SA	1/1.5/2/3/8	700/470/360/250/100	250	7.5W		
CT luminaires can integrate optional modules for expansion to other systems: LG module code 15036 - LGFM module code 15037 - DALI module 15038										
CTS	LG230									
	31216	24	COMPLETA LED LGS230	SE/SA			420	4.1W	8.5 VA	
	LG24									
31226	24	COMPLETA LED LGS24	SE/SA			400	400	3.8W		

NEXT >


Completa

emergency

ACCESSORIES - included




LH/RH/BOTTOM STICKERS
Order Code **4278**




RECESSED BOX
Order Code **3733**


ACCESSORIES - to be ordered separately




IP66 - IK09 ENCLOSURE KIT
To achieve a mechanical resistance up to 5 times greater than that of standard luminaires (IK07)
Order Code **4112**




BOTTOM EDGE MOUNTED SCREEN
Screen printing on clear polycarbonate
Order Code **4268**




WALL BRACKET X EDGE MOUNTING
Order Code **4265**




LH/RH EDGE MOUNTED SCREENS
Screen printing on clear polycarbonate
Order Code **4267**



FALSE CEILING BRACKET
Order Code **4266**



LH/RH/BOTTOM SCREENS
Screen printing on opal polycarbonate
Order Code **4269**



LG - LGFM - DALI MODULE (CT version only)
LG - Order Code **15036**
LGFM - Order Code **15037**
DALI - Order Code **15038**



PROTECTIVE GRILLE
Dimensions: 440x215x98,7 mm
Order Code **3912**