

DL-IP65-LED

Recessed LED downlight



Material:

- body: aluminium, silicone gasket
- color: white
- reflector: faceted aluminium reflector with clear glass cover

Degree of protection: IP65




Rated voltage: 230 V / 50 Hz

Temperature range: -20 to +35°C

Control gear: LED driver

Mounting: recessed for plasterboard or similar types of ceiling

Application: indoor

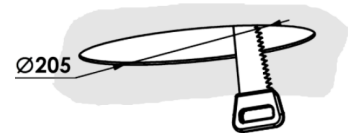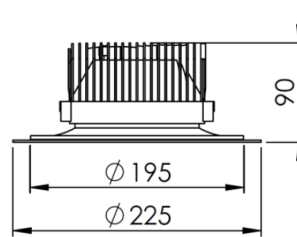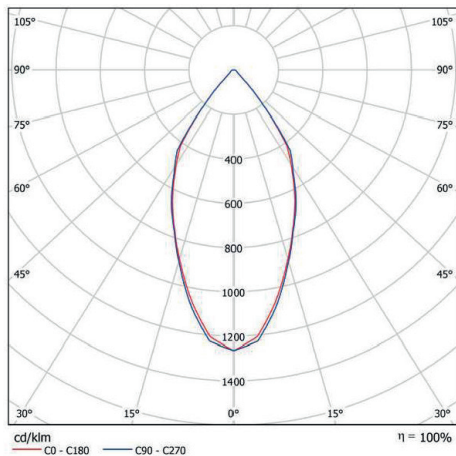

Code	Absorption W	Lum. flux (lm)	lm/W	Color temp. K	Ra	ØL x H (mm)	Kg
DLIP65LED	28	3 074	110	4000	80	Ø225(205) x 90	1,2
DLIP65LEDHO	42	4 426	105	4000	80	Ø225(205) x 90	1,2
DLIP65LED3	28	2 982	106	3000	80	Ø225(205) x 90	1,2
DLIP65LEDHO3	42	4 294	101	3000	80	Ø225(205) x 90	1,2