

Ticinque

emergency



IP65

IP42

IK07

850°



+40°C
0°C



High autonomy luminaire, up to 8hrs. In the Granluce version, the flux is up to 1,250 lm, with a set autonomy of 1h. Also suitable for special applications where high luminous fluxes are required (10lx with an autonomy of 90 min).



Available in both IP42 and IP65 protection ratings; with pictograms installed, the distance of visibility is 28m.



Easy installation thanks to the PG16/20 quick connector and the supplied IP Plug membranes. Quick connection on all 4 sides while maintaining the IP65 protection rating, even on an electrified track.

Applications

Industry, services, shopping centres

Characteristics

Power supply 230VAC ± 10%, 50÷60Hz

Mounting Wall, ceiling



Recharging time 12h

Housing Polycarbonate, white RAL 9003

Optics Symmetrical, white

Screen Clear polycarbonate

Compliance EN 60598-1, EN 60598-2-22, UNI EN 1838, UNI 11222, EN 62034

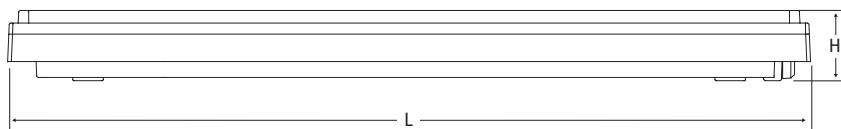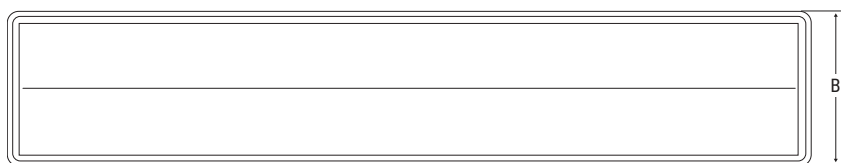

Dimensions mm			Distance of visibility (DV)
L	B	H	
549	147	43	28m

032

Performance according to EN 1838

Height (m)	Centre distance (m) ESCAPE ROUTES		Illuminated surface area (m) LARGE AREAS	
	Wall	Ceiling	Wall	Ceiling
2.5	8	-	8x8	-
3	-	16	-	11x11
7	-	22	-	14x14


Lighting >1lx at floor level along the centre line without reflections Emax/Emin <40

Lighting >0.5lx at floor level without reflections Emax/Emin <40

Performance with reference to luminaire **Order Code 8590** 800 lm

Maintenance coefficient 0.8



TICINQUE



■ C90-C270 ■ C0-C180

	Order code	W eq.	Description	Version	Autonomy h	Flux SE lm	BOOSTER BATTERY Flux SE lm >50%	Flux SA lm		Input power		Note
								DC	AC	DC	AC	
TR	8584	18	TICINQUE IP42 LED 18W SE 8	SE	8	260					1.7 W	IP42
	8585	18	TICINQUE IP42 LED 18W SA 8	SA	8	260		300			3.8 W	IP42
	8586	18	TICINQUE IP65 LED 18W SE 8	SE	8	260					1.7 W	IP65
	8587	18	TICINQUE IP65 LED 18W SA 8	SA	8	260		300			3.8 W	IP65
	8590	24	GRANLUCE T5 LED IP65 SE 2	SE	2	800					1.7 W	IP65
	8591	24	GRANLUCE T5 LED IP65 SA 2	SA	2	800		300			3.8 W	IP65
	8597	36	GRANLUCE T5 LED IP65 SE 1	SE	1	1500					1.7 W	IP65
	8598	36	GRANLUCE T5 LED IP65 SA 1	SA	1	1500		300			3.8 W	IP65
AT	8592	36	G.LUCE T5 LED AT AR IP65 SE	SE	1/1.5/2/3/8	1250/1000/800/550/210	RA06 BATTERY				3.4W	IP65
	8593	36	G.LUCE T5 LED AT AR IP65 SA	SA	1/1.5/2/3/8	1250/1000/800/550/210	RA06 BATTERY	500			6.6W	IP65

ACCESSORIES - included

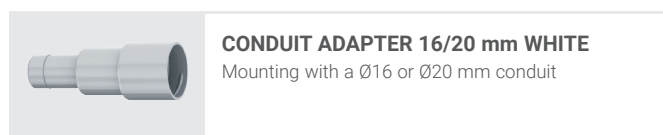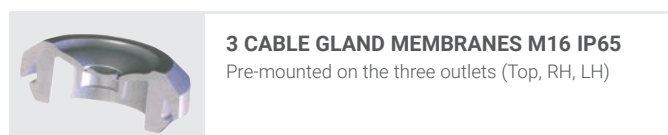

ACCESSORIES - to be ordered separately

