


Stile In

emergency



Luminaire designed for recessed mounting, with an autonomy of up to more than 8 hrs.



The extensive range of accessories allows one luminaire to be used for recessed, edge mounting and plasterboard applications.



For recessed mounting, a box is provided; for ceiling mounting, the housing is pre-fitted with several pre-drilled inlets to allow the entry of wire ways from all directions.

Applications

Services, commercial activities, shops, restaurants, offices

Characteristics

Power supply 230VAC \pm 10%, 50-60Hz

Mounting Wall, ceiling, recessed, false ceiling, edge mounting


Recharging time 12h

Housing Polycarbonate, white RAL 9003

Optics symmetrical, polycarbonate, white

Screen Clear polycarbonate

Compliance EN 60598-1, EN 60598-2-2, EN 60598-2-22, UNI EN 1838, UNI 11222, EN 62034

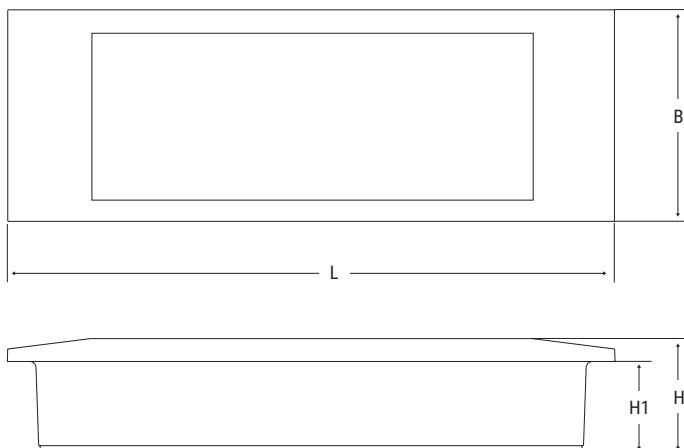


Dimensions mm				Distance of visibility (DV)	
L	B	H	H1	screen	edge mounting
292	102	55.5	44.5	15m	20m

Performance according to EN 1838


Height (m)	Centre distance (m) ESCAPE ROUTES		Illuminated surface area (m) LARGE AREAS	
	Wall	Ceiling	Wall	Ceiling
2.5	5	-	3x3	-
3	-	7	-	5x5
Lighting >1lx at floor level along the centre line without reflections Emax/Emin <40			Lighting >0.5lx at floor level without reflections Emax/Emin <40	
Performance with reference to luminaire Order Code 1499L 130 lm			Maintenance coefficient 0.8	

STILE IN 1499, 1499-24



■ C90-C270 ■ C0-C180


STILE IN 1499L



■ C90-C270 ■ C0-C180

	Order code	W eq.	Description	Version	Autonomy h	Flux SE lm	Flux SA lm	Input power		Note
								DC	AC	
TR	1499	11	STILE IN LED 11 SE8P	SE	8	130		2 W		
	1499/24	24	STILE IN LED 24 SE6P	SE	6	200		2 W		
	1499L	11	STILE IN LED 11 SE8	SE	8	130		2 W		

ACCESSORIES - included

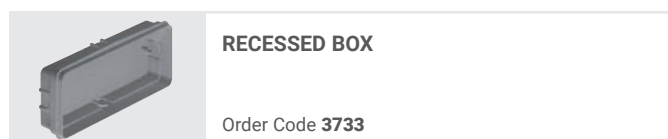

ACCESSORIES - to be ordered separately

