



# X-Six SQ LED


downlight



IP20 IK05  $\lambda$  650°   +40°C -20°C CCT

 Downlight with wide beam and integrated driver.

 Both recessed and ceiling mounted installation.  
Color temperature adjustment system in 3 steps possible with switch.

 Bayonet bracket and interlocking ceiling adapter, recessed springs supplied. Pre-wired cable ready for connection L=20cm.

## Application

Residential, tertiary, retail, offices  
Not suitable for intensive use.

## Characteristics

**Power supply** 220÷240 Vac, 50÷60 Hz

**Luminous flux maintenance at 25°C**  
>30.000h (L80B20)

**Color stability** 3 SDCM

**Installation** Recessed, ceiling


**Body** Polycarbonate

**Optics** Diffusing, symmetrical

**Screen** Polycarbonate with opal finish


**Colore** White

**Standards** EN60598-1, EN60598-2-2,  
EN 62471

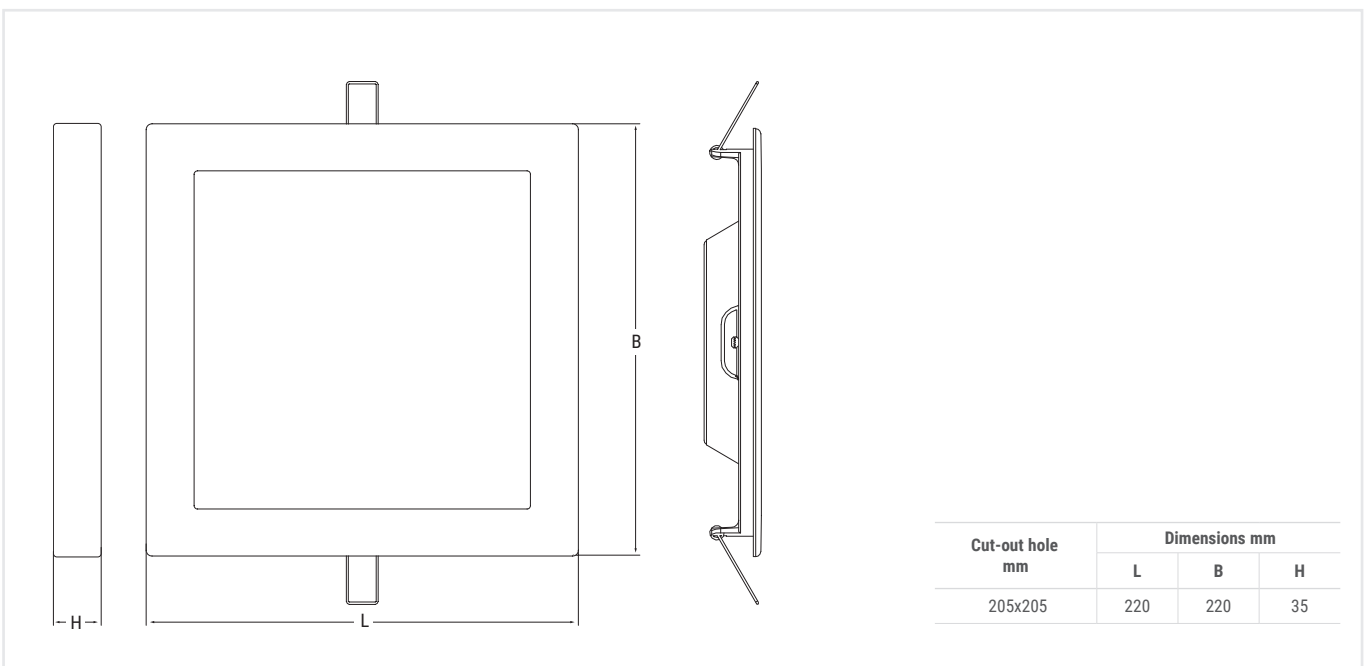

Cut-out hole mm	Dimensions mm		
	L	B	H
205x205	220	220	35

## X-SIX SQ LED



■ C0-C180

■ C90-C270



### BRACKET FOR CEILING INSTALLATION WITH BAYONET FIXING

This luminaire is equipped with a system that allows it to be installed both recessed and surface-mounted. In the case of recessed installation, two springs are included, which snap into the back of the body. In the case of ceiling-mounted installation, a spacer is used, which is inserted into the luminaire, which in turn is equipped with a bracket to be fixed to the ceiling on which to insert the luminaire with a bayonet coupling.

	Order code	Description	Power W	Color temp. K	CRI	Lumin. flux LED lm (Tj=25°C)	Lumin. flux of luminaire lm	lm/W	Weight Kg	Package Sing/Mult.
CCT	71061	X-SIX SQ LED CCT 20W	20	CCT 3000-4000-6000	>80	2100	1600	80	0.5	1/20

## ACCESSORIES - supplied



**SPRINGS FOR RECESSED INSTALLATION INTO A FALSE CEILING**  
2 pcs