








Přečtěte si návod před montáží a uschovejte si jej pro budoucí použití

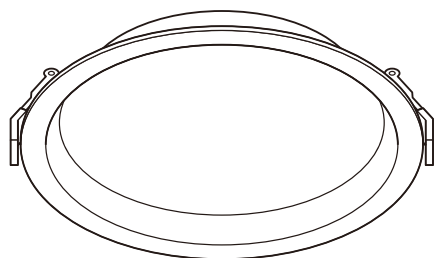



Výkon: 15W
model: A71-10331CED
rozměry: 160×53mm

 Φ 150mm
 3-20mm

Výkon: 25W
model: A71-10333CED
rozměry: 215×62mm


 Φ 200mm
 3-20mm

Výkon: 35W
model: A71-10335CED
rozměry: 215×62mm

 Φ 200mm
 3-20mm

TECHNICKÉ PARAMETRY

- **Tělo:** hliník + akrylický difuzor
- **Ochrana před zásahem el. proudem:** třída II, dvojitá izolace
- **Stupeň krytí:** IP44, zepředu
- **Driver:** dodávaný včetně
- **Hodnocení kvality/koroze:** QC22: doba zahoření: 12/24h cyklus. Komerční využití, uvnitř budov, mimo korozivní prostředí.
- **Teplota prostředí:** -20°C až +40°C.

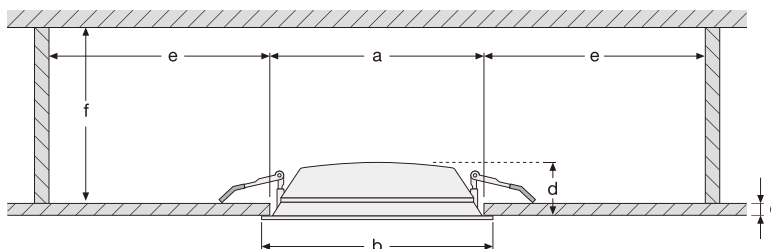

UPOZORNĚNÍ:


VAROVÁNÍ - riziko úrazu elektrickým proudem. Instalace LED mřížky vyžaduje znalost svítidel a elektrických systémů.

Přenechejte instalaci kvalifikovanému personálu. **VAROVÁNÍ** - Aby se zabránilo poškození kabeláže, nevystavujte kabely hranám plechů nebo jiným ostrým objektům.

HYGIENA A BEZPEČNOST


Doporučujeme použití měkkého hadříku pro čištění. Nepoužívejte žádné chemické látky, aby se zabránilo poškození povrchu svítidla.

Pro Vaši bezpečnost odpojte napájení svítidla před výměnou nebo čištěním zdroje svítidla.

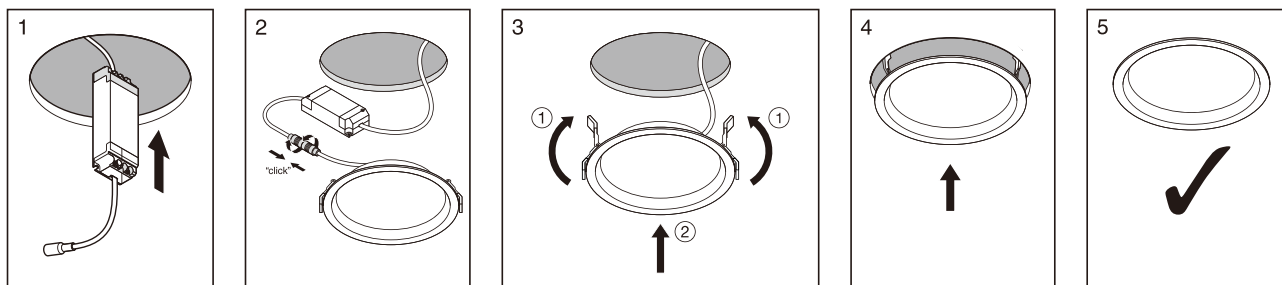





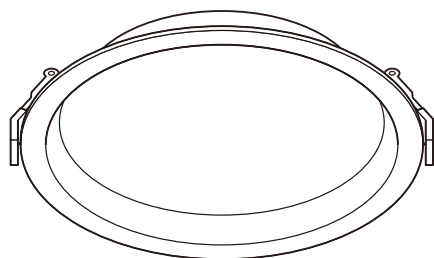

Please read instructions before commencing installation and retain for future reference.





Power: 15W
model: A71-10331CED
size: 160×53mm

 Φ 150mm
 3-20mm

Power: 25W
model: A71-10333CED
size: 215×62mm


 Φ 200mm
 3-20mm

Power: 35W
model: A71-10335CED
size: 215×62mm

 Φ 200mm
 3-20mm

SPECIFICATIONS:

- **Fitting:** Aluminium body + acrylic diffuser
- **Protection against electric shock:** CLASS II, Double insulated. Does not require earth connection.
- **Ingress Protection:** IP44 Front.
- **Driver:** Included.
- **Quality/Corrosive rating:** QC22: Burning period: 12hrs/24hr cycle. Commercial use, indoor except in corrosive environments.
- **Ambient temperature range:** -20°C to +40°C.

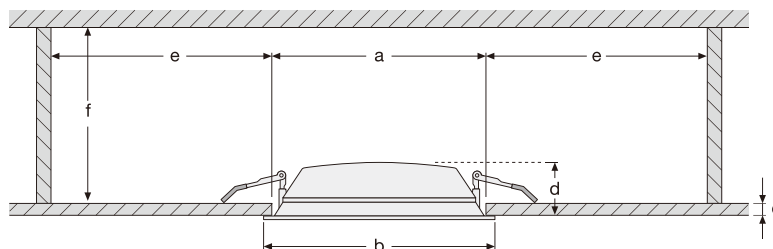

CAUTION:

WARNING-Risk of fire or electric shock. LED Grille light installation requires knowledge of luminaire electrical systems.

If not qualified, do not attempt installation. Contact a qualified electrician. WARNING-To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects

HYGIENE & SAFETY

We advise to use the soft cloth to clean up and do not attempt to use any chemical agent in order to avoid any damages from the surface.

For your safety, please cut off the power supply before changing or cleaning the lamp source.

