




# Multi Lens


emergency



 Minimal aesthetic impact and high performance with a 10-year warranty.

 A single luminaire for escape routes up to 12m and for panic areas up to 90sqm. Adjustable autonomy from 1 to 8 hrs.

 Three interchangeable lenses supplied for mounting from 3 to 7m high, with different light beams.

 Springs for quick fastening to false ceilings.  
Recessed hole  $\varnothing 60$  mm.

## Applications

Services, offices, cinemas, hotels, schools, shops, shopping centres, showrooms

## Characteristics

**Power supply** 230VAC  $\pm 10\%$ , 50÷60Hz


**Mounting** Recessed

**Recharging time** 12h




**Housing** Polycarbonate

**Optics** Highly transparent PMMA lenses


**Compliance** EN 60598-1, EN 60598-2-2, EN 60598-2-22, UNI EN 1838, UNI 11222, EN 62034

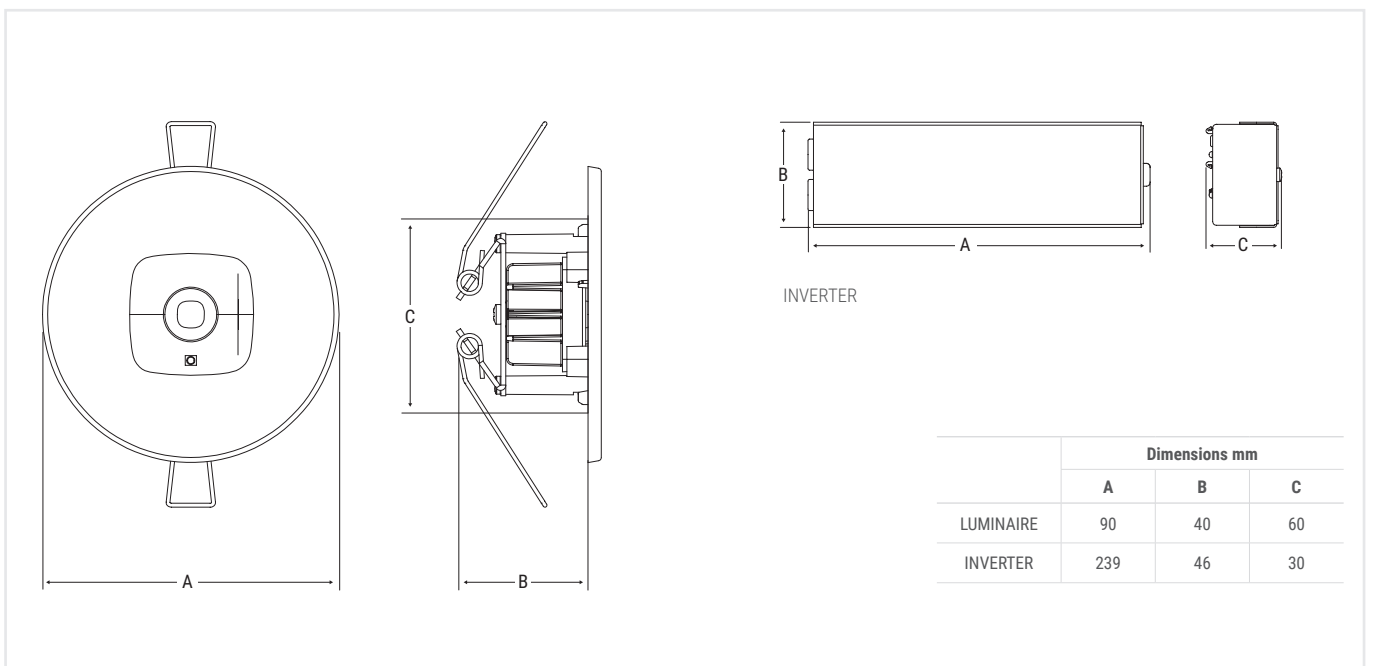

# Reference standard UNI EN 1838


Lens	Height (m) 	Centre distance (m) ESCAPE ROUTES 		Illuminated surface area (m) LARGE AREAS 	
		Wall	Ceiling	Wall	Ceiling
Lungaluce	3	-	17	-	-
Largaluce	3	-	-	-	12x12
Altaluce	7	-	15	-	-
Lighting >1lx at floor level along the centre line without reflections Emax/Emin <40				Lighting >0.5lx at floor level without reflections Emax/Emin <40	
Performance with reference to luminaire <b>Order Code 4334</b> 450lm				Maintenance coefficient 0.8	

## LUNGALUCE 87%




■ C90-C270 ■ C0-C180

## LARGALUCE 92%






■ C90-C270 ■ C0-C180

## ALTALUCE 85%





■ C90-C270 ■ C0-C180

	Order code	W eq.	Description	Version	Autonomy h	Flux SE lm	Flux SA lm	Input power		Note
								DC	AC	
<b>TR</b>	4330	24	MULTI LENS 60MM SE 1H RM	SE	1	250			1.0 W	
	4331	11	MULTI LENS 60MM SE 3H RM	SE	3	150			1.5 W	
	4334	24GL	MULTI LENS GL 60MM SA 123H RM	SE/SA	1/2/3	450/250/150	220		3.0 W	
	4335	24GL	MULTI LENS GL 60MM SA 236H RM	SE/SA	2/3/6	450/300/150	220		3.0 W	
<b>AT</b>	4395	24	MULTI LENS AT SE	SE	1/1.5/2/3/8	250/200/150/80/50			2.2W	
	4396	24	MULTI LENS AT SA	SE/SA	1/1.5/2/3/8	250/200/150/80/50	220		5.0 W	
	4394	24GL	MULTI LENS GL AT SA	SE/SA	1/1.5/2/3/8	450/330/250/160/70	220		5.0 W	
<b>CT</b>	4390	24	MULTI LENS CT SE	SE	1/1.5/2/3/8	250/200/150/80/50			2.2W	
	4391	24	MULTI LENS CT SA	SE/SA	1/1.5/2/3/8	250/200/150/80/50	220		5.0 W	
	4393	24GL	MULTI LENS GL CT SA	SE/SA	1/1.5/2/3/8	450/330/250/160/70	220		5.0 W	
CT luminaires can integrate optional modules for expansion to other systems: LG module code 15036 - LGFM module code 15037 - DALI module 15038										
<b>CTS</b>	<b>LG230</b>									
	31218	24	MULTI LENS LGS230	SE/SA			380	4.1 W	8.3 VA	
	<b>LG24</b>									
32127	24	MULTI LENS LGS24	SE/SA			380	380	3.8 W		

## ACCESSORIES - included

	<b>LUNGALUCE LENS WITH COVER</b>		<b>LARGALUCE LENS WITH COVER</b>		<b>ALTALUCE LENS WITH COVER</b>
--	----------------------------------	---	----------------------------------	---	---------------------------------

## ACCESSORIES - to be ordered separately

	<b>LG - LGFM - DALI MODULE</b> (CT version only) <b>LG</b> - Order Code <b>15036</b> <b>LGFM</b> - Order Code <b>15037</b> <b>DALI</b> - Order Code <b>15038</b>	 <b>RM INIBIT REMOTE CONTROL</b> For TR versions Order Code <b>2730</b>
--	---	--