

Pratica IP42

emergency



- IP42
- IK07
- 850°
-
- +40°C
0°C



Luminaire suitable for both emergency lighting and signage, thanks to the pictograms provided. Housing built to withstand outdoor use, equipped with an innovative battery with a 5-year warranty.



Unique luminaire with SE and SA function, with adjustable autonomy from 1 to 3hrs.



Large spaces inside the product facilitate wiring and maintenance. The housing is equipped with 3 x $\varnothing 16$ pre-drilled inlets and can be installed over a 503 box. Recessed box supplied.

Applications

Services, commercial activities, shops, restaurants, offices

Characteristics

Power supply 230VAC \pm 10%, 50÷60Hz


Mounting Wall, ceiling, recessed, suspended, electrified track

Recharging time 12h

Housing Polycarbonate, white RAL 9003




Screen Clear polycarbonate

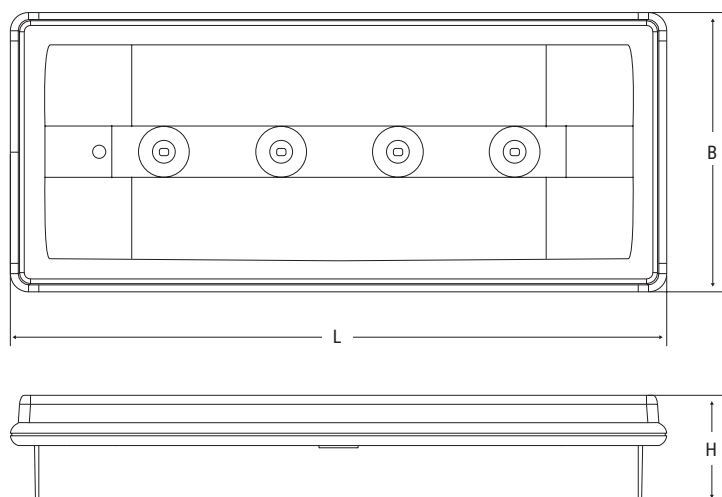Compliance EN 60598-1, EN 60598-2-2, EN 60598-2-22, UNI EN 1838, UNI 11222, EN 62034




Dimensions mm			Distance of visibility (DV)
L	B	H	
280	119	46	21m

Performance according to EN 1838

Height (m) 	Centre distance (m) ESCAPE ROUTES 		Illuminated surface area (m) LARGE AREAS 	
	Wall	Ceiling	Wall	Ceiling
2.5	5	-	3x3	-
3	-	8	-	6x6
Lighting >1lx at floor level along the centre line without reflections Emax/Emin <40			Lighting >0.5lx at floor level without reflections Emax/Emin <40	
Performance with reference to luminaire Order Code 4400 100 lm			Maintenance coefficient 0.8	

PRATICA IP42


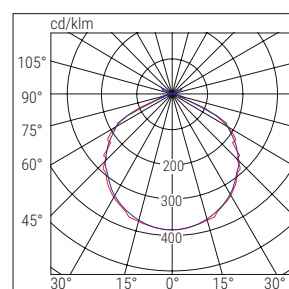


■ C0-C180

■ C90-C270

	Order code	W eq.	Description	Version	Autonomy h	Flux SE lm	Flux SA lm	Input power		Note
								DC	AC	
TR	4400	11	PRATICA IP42 200L 1/1.5/3 SATR	SE/SA	1/1.5/3	200/160/100	180		1.4 W	
	4401	18	PRATICA IP42 300L 1.5/3 SATR	SE/SA	1.5/3	300/160	180		2.5 W	
	4402	24	PRATICA IP42 500L 1.5/3 SATR	SE/SA	1.5/3	500/250	180		2.5 W	
AT	4403	11	PRATICA IP42 200L SA AT	SE/SA	1/1.5/2/3/8	200/160/130/100/30	180		1.4 W	
	4404	18	PRATICA IP42 300L SA AT	SE/SA	1/1.5/2/3/8	300/300/250/160/70	180		4.8 W	
	4405	24	PRATICA IP42 500L SA AT	SE/SA	1/1.5/2/3/8	500/500/350/250/100	180		4.8 W	

ACCESSORIES - included

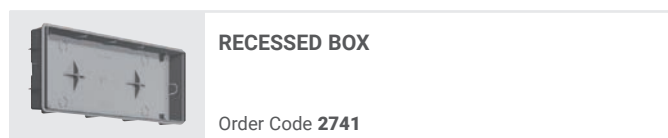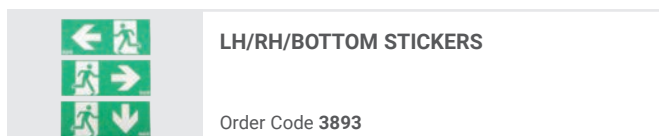

ACCESSORIES - to be ordered separately

