

Lite Hi Bay LED

High Bay

A new generation of an industrial high-bay with integrated high efficiency LEDs. The extremely reduced weight of the body allows for easy installation.

Body is in die-cast aluminium with cooling fins, so the luminaire is always efficient and it has the correct working temperature. Diffuser is made of polycarbonate.

Heat dissipation system of the Lite Hi Bay LED consists of die-cast aluminium designed with the most advanced software of heat analysis. Optimal heat dissipation enables high efficacy, low power consumption and long LED life.



76312/N a 76304/N



GENERAL CHARACTERISTICS

Power supply 230 VAC - 50/60 Hz

Standard EN60598-1; EN60598-2-1;

Protection grade IP65, IK10

Working temp. -25 °C ÷ +50 °C

Mounting Suspended

Housing Die-cast aluminum, black

Diffuser Polycarbonate


Driver Electronic

Life >50 000 h



Beam angle 90°



76303/NBS

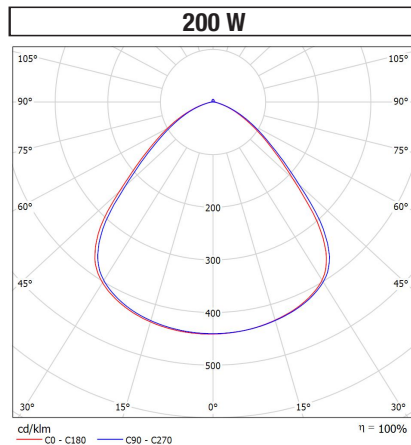

W	H (mm)	∅	kg
100	157	280	3,1
150	168	340	4,1
200	171	380	4,7



ACCESSORIES – supplied

Code	Description	Package
-	hinge for suspended mounting	1

Lite Hi Bay LED

Code	Description	Power of fixture W	Colour Temp. K	CRI	Flux of fixture (lm)	lm/W	Package
76312/N	LITE HIGHBAY LED 100W BLACK 4K	100	4000K	>80	16000	160	1
76303/NBS	LITE HIGHBAY LED 150W BLACK 4K	150	4000K	>80	22500	150	1
76304/N	LITE HIGHBAY LED 200W BLACK 4K	200	4000K	>80	31000	155	1