

P236/258

lighting



LED efficiency of up to more than 110 lm/W.



Anti-glare polished aluminium blade optics UGR<19.



Feed-through wiring and accessories for mechanical fastening in continuous rows.

Applications

Services, retail, offices, schools

Characteristics

Power supply

SD Universal Multi Voltage 93÷265VAC
50÷60Hz, 176÷250VDC

Power supply - MTBF at 25°C 65,000h

Luminous flux retention at 25°C

>70,000h (L80B20)


Colour stability 3 SDCM

Mounting ceiling, suspended

Housing Polyester powder-coated pre-galvanised sheet steel, RAL 9003

Optics Dark light blades

Compliance EN 60598-1, EN 60598-2-2, EN 60598-2-22, EN 62471 (biological risk-free) 2014/53/EU



■ C90-C270
■ C0-C180


IP20

IK05

960°

+40°C
-20°C

UGR<19

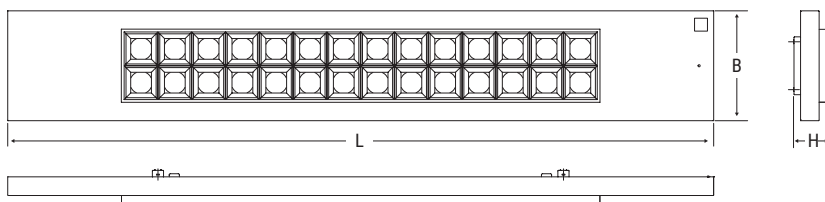

Dimensions mm

L	B	H
1327	202	70

050


	Order Code	Description	Power W	Colour temp. K	Chromatic yield	LED Flux lm (Tj=25°C)	Luminaire flux lm	Brightness efficiency lm/W	Weight Kg	Packaging Single/ Multi pack	Notes and compliance
SD	P236SD	CEILING LED 2x36 SD 4K	36	4000	>80	4800	4000	111	4.6	1	
	P258SD	CEILING LED 2x58 SD 4K	47	4000	>80	6160	5100	109	4.6	1	

AUTO-DIMMER

DALI **INTERFACING WITH ACCESSORY TO BE ORDERED SEPARATELY:**
 It is possible to create DALI luminaires by integrating the version **SD** with the accessory **Dali Module** Order Code **15024**
 Example: Order Code **P236SD+ 15024** = Luminaire **P236SD** in the DALI version


DALI

ACCESSORIES - included




SMART DIMMER LIGHT SENSOR

Order Code **15039**



ACCESSORIES - to be ordered separately




SINGLE SUSPENSION

Order Code **20080**




SUSPENSION+SINGLE MAINS CABLE

Order Code **20081**



CONTINUOUS ROW BRACKET SUSPENSION/BRACKET + CABLE

Order Code **20087**



THREE-PHASE FEED-THROUGH CABLE



Order Code **20088**


BUILDING AUTOMATION - to be ordered separately



LOGICA SD LGFM CONTROL UNIT


Order Code **21102**







DALI MODULE


Order Code **15024**






BUILDING AUTOMATION RADIO MODULE


Order Code **15022**






1÷10V MODULE


Order Code **15034**





BUILDING AUTOMATION RADIO TRANSMITTER

Order Code **20104**



LED INVERTER EMERGENCY LUMINAIRE - to be ordered separately



INVERTER PLUG&LIGHT SE/SA 1-3h 20-60V

Order Code **19358** (1h)
 Order Code **19359** (3h)






INVERTER GL AT/LG AR 15W 55V


Order Code **19391** (LiFe battery)
 Order Code **19390** (LTO battery)





INVERTER AT/LG AR 9W 55V

Order Code **19355L** (LiFe battery)





LGFM EMERGENCY MODULE
 For AT/LG series inverters only

Order Code **19375**



051 systems - ceiling and suspended mounting