

# Ticinque TuttoLED

emergency



IP65 IP42 IK07 850°  +40°C  
0°C



Autonomy up to 5hrs, luminous flux up to 400lm.



Available in both IP42 and IP65 protection ratings; with pictograms installed, the distance of visibility is 28m.



Equipped with PG16/20 quick connector and IP Plug membranes for quick connections on all 4 sides.

## Applications

Industry, services

## Characteristics

**Power supply** 230VAC  $\pm$  10%, 50÷60Hz

**Mounting** Wall, ceiling


**Recharging time** 12h

**Housing** Polycarbonate, grey RAL 7035

**Optics** Symmetrical, white

**Screen** Clear polycarbonate

**Compliance** EN 60598-1, EN 60598-2-22, UNI EN 1838, UNI 11222, EN 62034

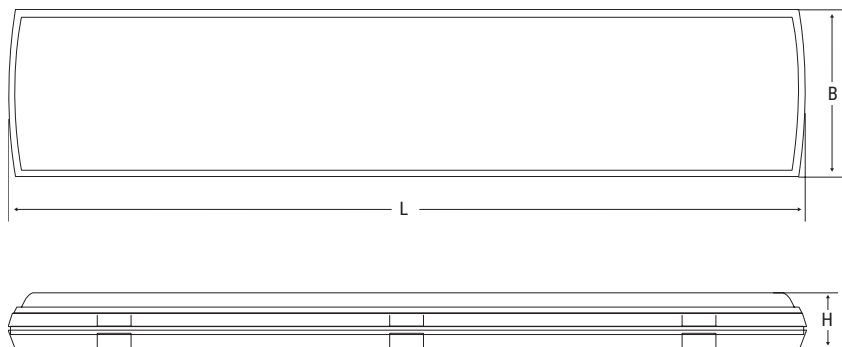


Dimensions mm			Distance of visibility (DV)
L	B	H	
610	128	54	28m

034

## Performance according to EN 1838

Height (m)	Centre distance (m) ESCAPE ROUTES		Illuminated surface area (m) LARGE AREAS	
	Wall	Ceiling	Wall	Ceiling
2.5	7	-	6x6	-
3	-	12	-	9x9
Lighting >1lx at floor level along the centre line without reflections Emax/Emin <40			Lighting >0.5lx at floor level without reflections Emax/Emin <40	
Performance with reference to luminaire <b>Order Code 8595</b> 400 lm			Maintenance coefficient 0.8	

## TICINQUE TUTTOLED


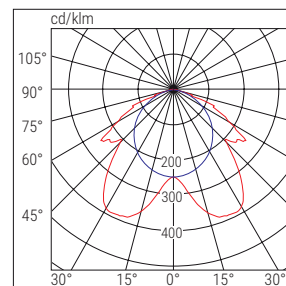


■ C90-C270

■ C0-C180

	Order code	W eq.	Description	Version	Autonomy h	Flux SE lm	Flux SA lm	Input power		Note
								DC	AC	
TR	8594	18	T5 TUTTOLED IP42 18 SE 5	SE	5	400	-	1.7W		IP42
	8596	18	T5 TUTTOLED IP65 18 SA 5	SE/SA	5	400	300	3.8W		IP65
	8595	18	T5 TUTTOLED IP65 18 SE 5	SE	5	400	-	1.7W		IP65

## ACCESSORIES - included

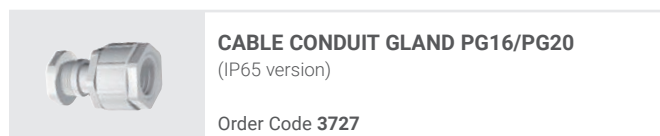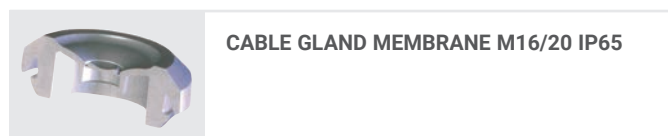

## ACCESSORIES - to be ordered separately

