




Lungalargaluce-recessed mounting


emergency



 Recessed luminaire with multi-purpose beam and very low aesthetic impact.

 A single luminaire for escape routes up to more than 17m and for panic areas up to 130sqm. Adjustable autonomy from 1 to 8 hrs.

 Two lenses supplied. Optional asymmetrical accent lens for illuminating fire fighting and protective equipment.

 Extremely quick mounting thanks to steel springs that allow orientation even after installation. Recessed hole \varnothing 80±100mm.

Applications

Services, offices, cinemas, hotels, museums, schools, shops, shopping centres, design rooms

Characteristics

Power supply* 230VAC \pm 10%, 50÷60Hz

Mounting False ceiling, recessed


Recharging time 12h

Housing Polycarbonate, white RAL 9010

Optics Highly transparent PMMA lenses

Compliance EN 60598-1, EN 60598-2-2, EN 60598-2-22, UNI EN 1838, UNI 11222, EN 62034

* LG230, LG24 systems consider the parameters of the control unit used

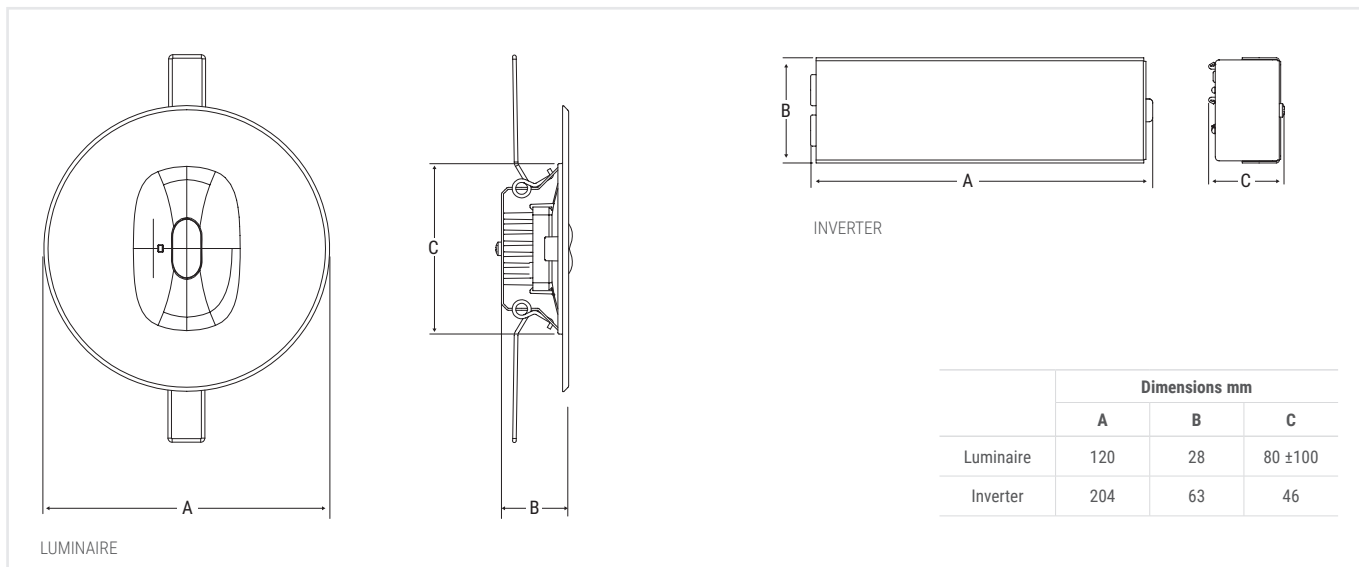


Reference standard UNI EN 1838

Lens	Height (m)	Centre distance (m) ESCAPE ROUTES		Illuminated surface area (m) LARGE AREAS	
		Wall	Ceiling	Wall	Ceiling
Lungaluce	3	-	20	-	-
Largaluce	3	-	-	-	12x12
Lighting >1lx at floor level along the centre line without reflections Emax/Emin <40				Lighting >0.5lx at floor level without reflections Emax/Emin <40	
Performance with reference to luminaire Order Code 19339 450lm				Maintenance coefficient 0.8	



LUNGALUCE


87%



■ C90-C270 ■ C0-C180

LARGALUCE



95%






■ C90-C270 ■ C0-C180

	Order code	W eq.	Description	Version	Autonomy h	Flux SE lm	Flux SA lm	Input power		Note
								DC	AC	
CT	19338	24	LLARG DWRC CT 24W SA	SE/SA	1/1.5/ 2/3/8	250/200/150/80/50	220		5 W	
	19339	24GL	LLARG DWRC CT 24W GL SA	SE/SA	1/1.5/ 2/3/8	450/330/250/160/70	220		5 W	
CT luminaires can integrate optional modules for expansion to other systems: LG module code 15036 - LGFM module code 15037 - DALI module 15038										
CTS	LG230									
	17878	24	L.LARGA DWRC LGS230	SE/SA			380	4.1 W	8.3 VA	
	LG24									
17879	24	L.LARGA DWRC LGS24 LS-UV	SE/SA			380	380	3.8 W		

ACCESSORIES - included

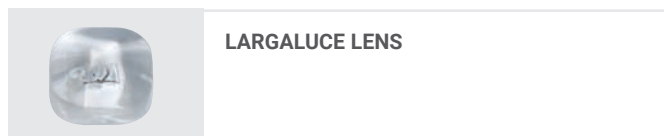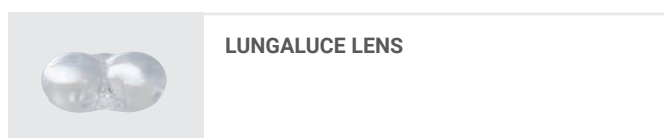

ACCESSORIES - to be ordered separately

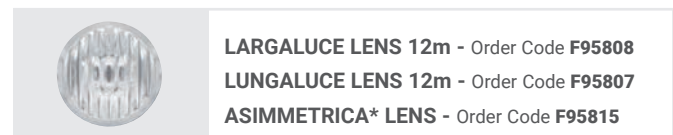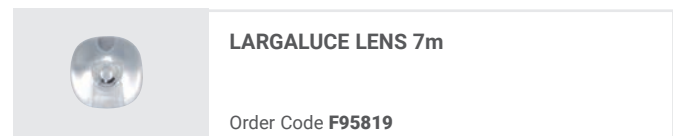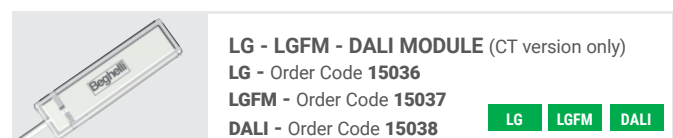

Lens photometry and fluxes are available in the electronic catalogue on begelli.com.