

GeoLed Lite

wall and ceiling







IP65

IK05

850°

+40°C
-20°C

-  Extra compact multipurpose ceiling light, suitable for indoor and outdoor environments.
-  Both wall and ceiling installation, available in both white and black.
-  White reflector and screen with high diffusing capacity to maximize the light beam in all directions.
-  Quick bracket and rear quick wiring compartment.

Application

Residential, tertiary, stair ramps, terraces, porches, external access areas of shops, hotels and restaurants.

Characteristics

Power supply 220÷240 Vac, 50÷60Hz

Luminous flux maintenance at 25°C
>30.000h (L70B50)

Color stability 3 SDCM



Installation Ceiling, wall

Body Self-extinguishing UV-stabilised polycarbonate

Screen Self-extinguishing UV-stabilised polycarbonate, opaline


Color White, black

Standards EN60598-1, EN60598-2-1, EN62471

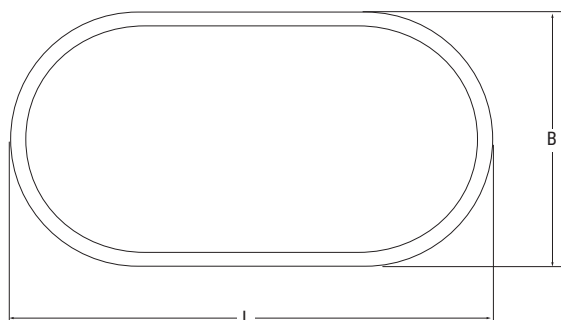


W	Dimensions mm		
	L	B	H
15	214	114	63
20	269	145	74

GEOLED LITE 15W

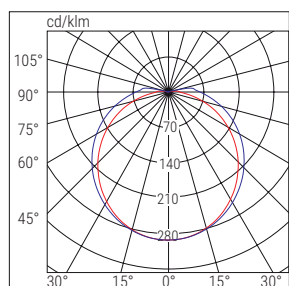

■ C180-C270 ■ C90-C270

GEOLED LITE 20W

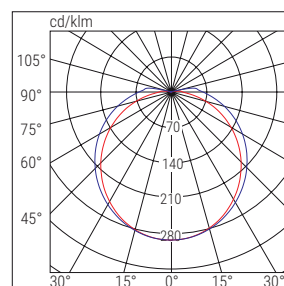

■ C0-C180 ■ C90-C270



QUICK-WIRING COMPARTMENT

Terminal block enclosed in a convenient rear compartment equipped with a watertight door. Thanks to a gasket incorporated into the cover, preservation of the IP65 protection degree is guaranteed.

	Order code	Description	Power W	Color temp. K	CRI	Lumin. flux LED lm (Tj=25°C)	Lumin. flux of luminaire lm	lm/W	Weight Kg	Package Sing/Mult.	
ON-OFF	75425	GEO LED 15W OVAL BLACK 4K	15	4000	>80	2025	1250	83	0.28	1/12	NERO
	75427	GEO LED 20W OVAL BLACK 4K	20	4000	>80	2700	1650	83	0.43	1/6	
	75420	GEO LED 15W OVAL WHITE 3K	15	3000	>80	2025	1250	83	0.28	1/12	BIANCO
	75422	GEO LED 20W OVAL WHITE 3K	20	3000	>80	2340	1650	83	0.43	1/6	
	75421	GEO LED 15W OVAL WHITE 4K	15	4000	>80	2025	1250	83	0.28	1/12	
	75423	GEO LED 20W OVAL WHITE 4K	20	4000	>80	2340	1650	83	0.43	1/6	

ACCESSORIES - supplied



MOUNTING BRACKET



PG9 CABLE GLAND