

Downlight Ultra Compact LED

downlight



Small downlight with wide beam and integrated SELV driver.



Recessed installation in particularly narrow spaces.



Fixing springs on plasterboard and quick external connection terminal block.

- IP42
- IK05
- ∧ 650°
-
- +40°C
-20°C

Application

Residential, tertiary, retail, offices

Characteristics

Power supply 230 Vac, 50÷60 Hz

Luminous flux maintenance at 25°C
>35.000h (L80B20)

Color stability 3 SDCM

Installation Recessed


Body Polycarbonate

Optics Diffusing, symmetrical

Screen Polycarbonate with opal finish


Color White

Standards EN60598-1, EN60598-2-2, EN 62471

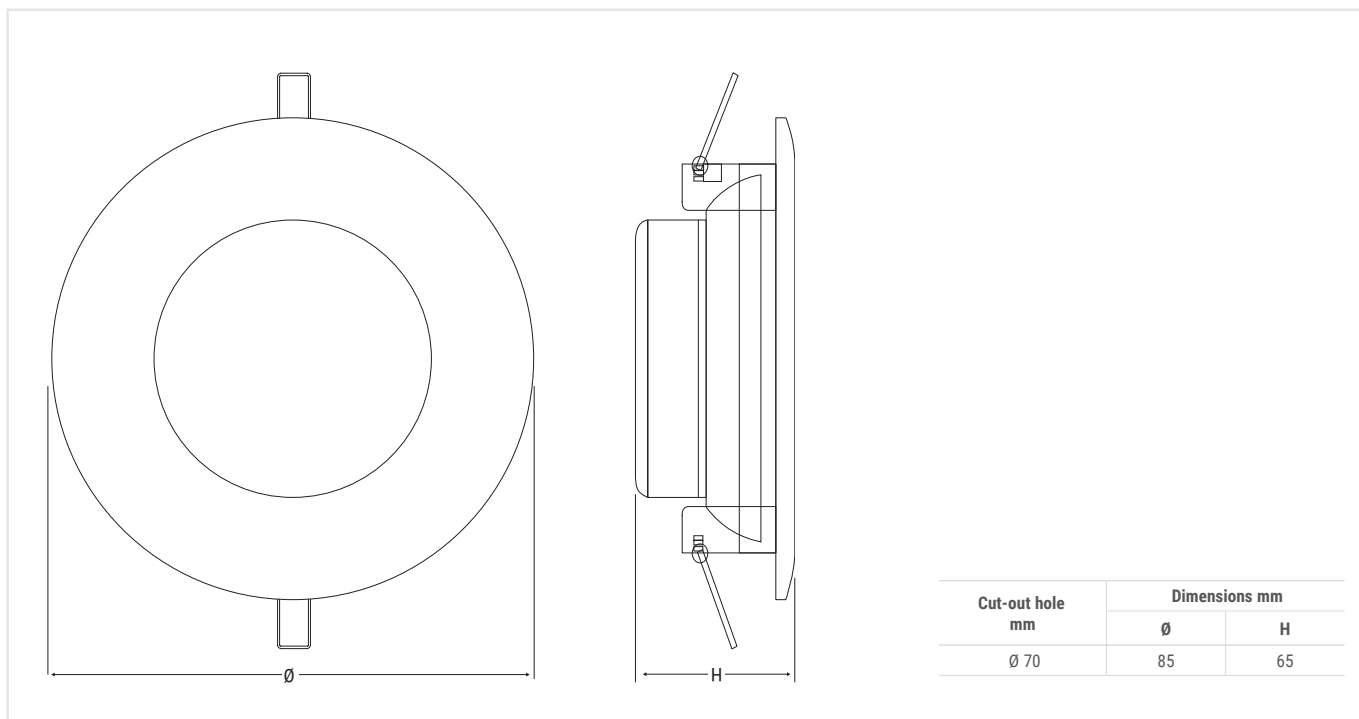

Cut-out hole mm	Dimensions mm	
	Ø	H
Ø 70	85	65

DWL ULTRATHIN SQ LED

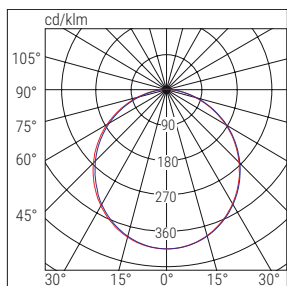

■ C0-C180 ■ C90-C270

	Order code	Description	Power W	Color temp. K	CRI	Lumin. flux LED lm (Tj=25°C)	Lumin. flux of luminaire lm	lm/W	Weight Kg	Package Sing/Mult.
ON-OFF	71050	DWL LED 8W 3K	8	3000	>80	1080	720	90	0.07	1/12
	71051	DWL LED 8W 4K	8	4000	>80	1080	720	90	0.07	1/12



39 downlight