

Nu.da

emergency



archieco : clean and elegant design lines with surfaces that can be painted together with the wall.



Small size compared to high luminous flux.



Monolithic screen made of shaped methacrylate, designed specifically to optimise light diffusion and to accommodate the pictogram, where required, with an excellent level of light uniformity.

Applications

Services and civil, even in design situations where special care is required to reduce the aesthetic impact of emergency lighting.

Characteristics

Power supply 230VAC \pm 10%, 50÷60Hz


Mounting Wall, ceiling

Recharging time 12h

Housing Polycarbonate, white RAL 9003

Optics PMMA

Compliance EN 60598-1, EN 60598-2-22, UNI EN 1838, UNI 11222, EN 62034

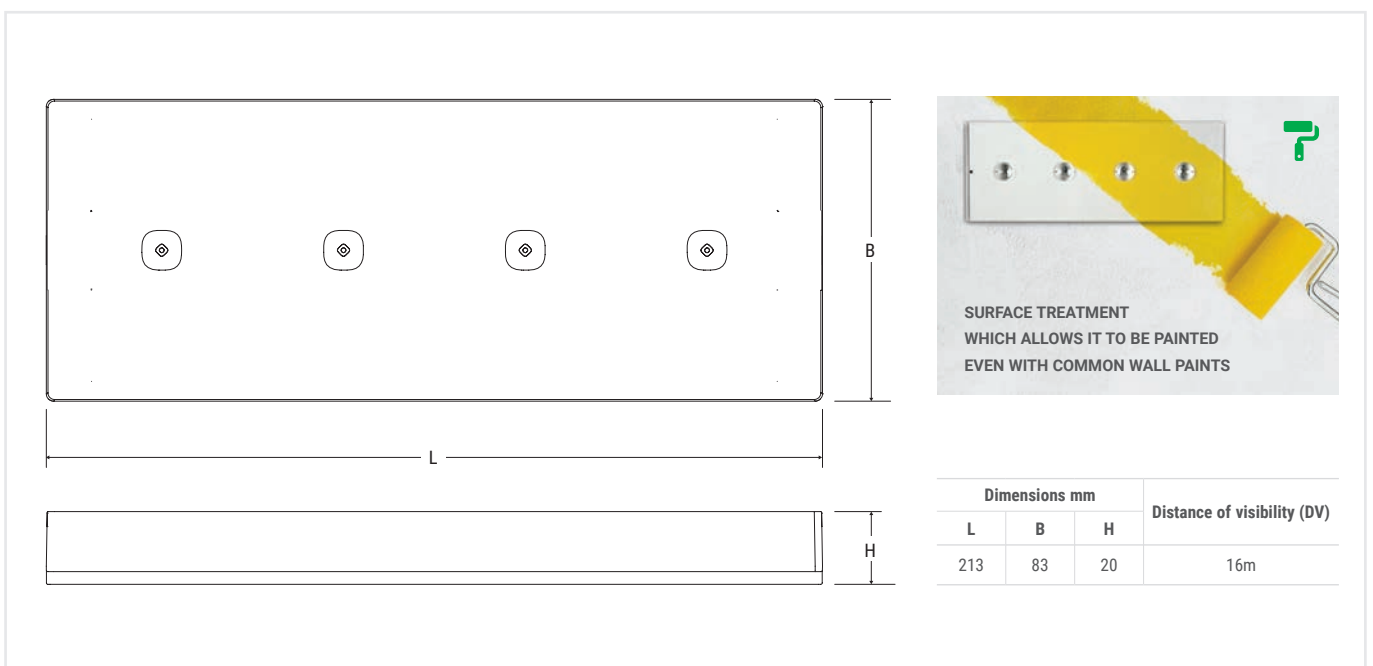


076

Performance according to EN 1838

Height (m)	Centre distance (m) ESCAPE ROUTES		Illuminated surface area (m) LARGE AREAS	
	Wall	Ceiling	Wall	Ceiling
2.5	7	-	5x6	-
3	-	10	-	7x7
Lighting >1lx at floor level along the centre line without reflections Emax/Emin <40			Lighting >0.5lx at floor level without reflections Emax/Emin <40	
Performance with reference to luminaire Order Code 19601 250 lm			Maintenance coefficient 0.8	

NU.DA




■ C0-C180 ■ C90-C270




	Order Code	W eq.	Description	Version	Autonomy h	FLUX SE lm	FLUX SA lm	Input power		Note
								DC	AC	
TR	19600	11	NU.DA AE SE 1/1.5/3 TR	SE	1/1.5/3	200/160/100			1 W	
	19601	24	NU.DA AE SE 1.5/3 TR	SE	1.5/3	300/160			1.3 W	
	19602	11	NU.DA AE SE/SA 1/1.5/3 TR	SE/SA	1/1.5/3	200/160/100	100		1.6 W	
	19603	24	NU.DA AE SE/SA 1.5/3 TR	SE/SA	1.5/3	300/160	170		2.5 W	
AT	19628	11-24	NU.DA 1124 AE AT SE	SE	1/1.5/2/3/8	250/170/130/85/35			1.7 W	
	19629	24-36	NU.DA 2436 AE AT SE	SE	1/1.5/2/3/8	450/305/230/155/65	170		1.7 W	
	19630	11-24	NU.DA 1124 AE AT SE/SA	SE/SA	1/1.5/2/3/8	250/170/130/85/35			3 W	
	19631	24-36	NU.DA 2436 AE AT SE/SA	SE/SA	1/1.5/2/3/8	450/305/230/155/65	170		3 W	
CT	19620	11-24	NU.DA 1124 AE CT SE	SE	1/1.5/2/3/8	250/170/130/85/35			1.7 W	
	19621	24-36	NU.DA 2436 AE CT SE	SE	1/1.5/2/3/8	450/305/230/155/65	170		1.7 W	
	19622	11-24	NU.DA 1124 AE CT SE/SA	SE/SA	1/1.5/2/3/8	250/170/130/85/35			3 W	
	19623	24-36	NU.DA 2436 AE CT SE/SA	SE/SA	1/1.5/2/3/8	450/305/230/155/65	170		3 W	


CT luminaires can integrate optional modules for expansion to other systems: LG module code 15036 - LGFM module code 15037 - DALI module code 15038

ACCESSORIES - to be ordered separately




LG - LGFM - DALI MODULE
 LG - Order Code 15036
 LGFM - Order Code 15037
 DALI - Order Code 15038

 LG
 LGFM
 DALI




LH/RH/BOTTOM/TOP STICKERS

Order Code 4329




THREE-PHASE TRACK KIT

Order Code 4319




PROTECTIVE GRILLE
 Dimensions: 305x110x100 mm


Order Code 3903



RM MODULE
 Rest Mode


Order Code 15048

 TR



RM INIBIT REMOTE CONTROL
 RM only for TR devices equipped with RM module

Order Code 2730

 RM