



SCOUT LED

Safety luminaire as mobile spotlight luminaire. Housing made of polycarbonate with adjustable luminaire head (120°). Luminaire head with a main and a para lamp, switchable. Charging and switchover device integrated in housing.

Version for portable use



TECHNICAL DATA

Housing:	Polycarbonate, orange (RAL 2009)	Service life $L_{50}B_{20}$:	50.000 h (main lamp & para lamp)
Frame:	Polycarbonate, grey (RAL 7026)	Color stability:	3 SDCM (main lamp & para lamp)
Connection cable:	H03VVH2-F 2x0.75 mm ² (1.3 m), black	Color temperature:	5.700 K (main lamp & para lamp)
Plug:	Euro plug, type C	Color rendering index:	70 (main lamp & para lamp)

IP40 IK09

SELF-CONTAINED SUPPLY

Switching:	Non-maintained
Mains supply:	230 V / 50/60 Hz
Ambient temperature:	0 °C to +40 °C
Protection class:	II

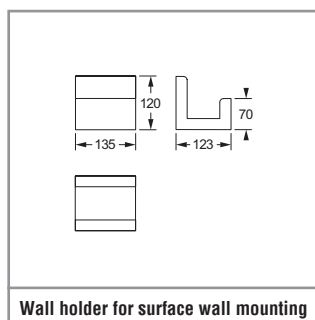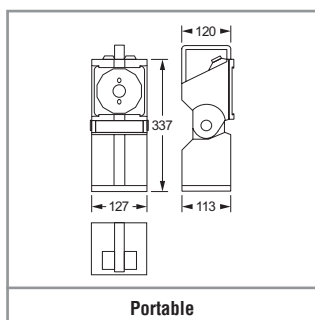

CLASSIC SELF-CONTAINED SUPPLY


Order code	LED	$\Phi=$		P
8380	1+1	230 lm (9.5 h) ¹ 23.5 lm (85 h) ²	Pb 6 V / 4.5 Ah	2.4 W ¹ 0.2 W ²

¹ Main lamp


² Para lamp



Carry belt, included in scope of delivery
– 3913



Color panes, included in scope of delivery
– 3729, 3730, 3731

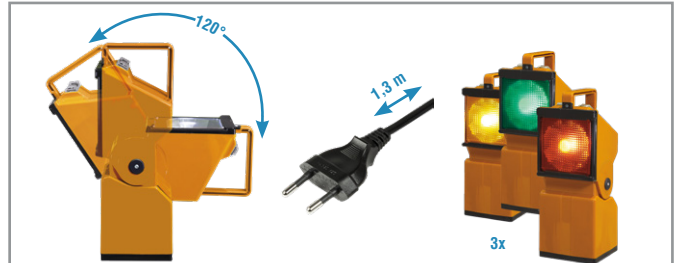

Adjustable luminaire head (120°), 1.3 m connection cable, 3 color panes

Included in scope of delivery	
Order code	Description
3913	Carry belt
3729	Color pane, red
3730	Color pane, orange
3731	Color pane, green

Please order accessories separately	
Order code	Description
2750	Wall holder