



Stagna Flat

STAGNA FLAT IP65 60CM 18W 4K

Order code **75456**

EAN 8002219895400

Technical specifications

Absorbed Power	18 W
Supply voltage type	AC
Nominal voltage (AC)	230 Vac
Ambient temperature (min)	-20 °C
Ambient temperature (max)	40 °C
Insulation class	II
CCT light tone	4000 K
Colour consistency	SDCM2
CRI color rendering	>80
Ballast	For constant current LED
Efficiency	120 lm/W
Equivalent power	2x18w
Frequency (max)	60 Hz
Frequency (min)	50 Hz
Power factor	0.9
Glow wire strength	550 °C - 30s.
MTBF driver	25000 h
Luminaire flux	2160 lm
Mounting	Ceiling
Voltage supply range (max)	240 V
Voltage supply range (min)	220 V



Installation and applications


Environment	Secondary Areas
Application	Offices, Production, Warehouses

Mechanical specifications

Height	40 mm
Length	600 mm
Width	72 mm
Weight	0.9 Kg
Colour housing	Grey
Protection grade IP	IP65
Protection grade IK	IK08

Certifications and norms

UK SI 2021 No. 1095, EN 62471:2008, EN IEC 60598-1:2021, EN 60598-2-1:1989, EN IEC 63000:2018, EN 62493:2010, EN 61000-3-3:2013, REG. 2019/2020(EU), EN IEC 55015:2019 + A11:2020, EN IEC 61000-3-2 :2019

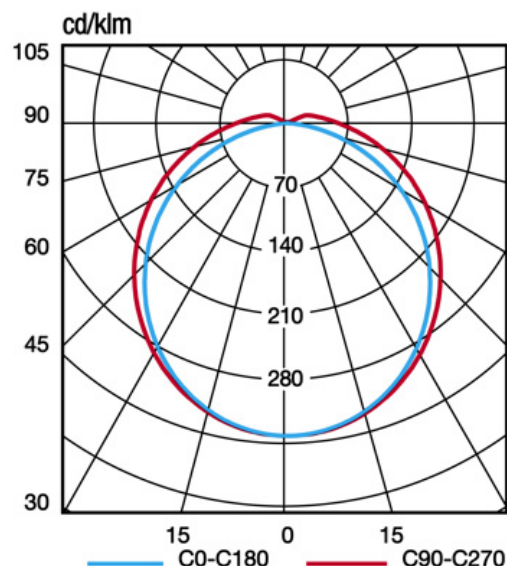

Accessories



201954000
KIT 2 GANCI SOSPEN ST EASY
LED