

# X-Step LED

Indoor LED luminaire



**Material:**

- color: white

**Degree of protection:** IP44, IK07

**Working temp.:** -20 ÷ +40°C

**Rated voltage:** 230 V/50 Hz


**Life:** 30.000h

**Beam angle:** 60°


**Mounting:** wall

**Application:** corridors, staircases, entrance areas

**X-Step LED 1.2**

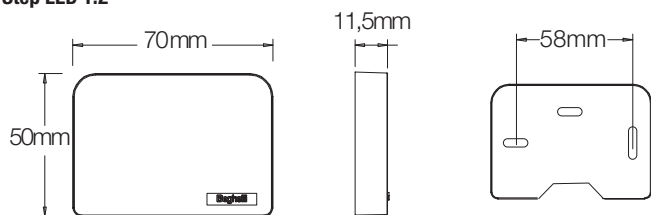

**X-Step LED 1.5**

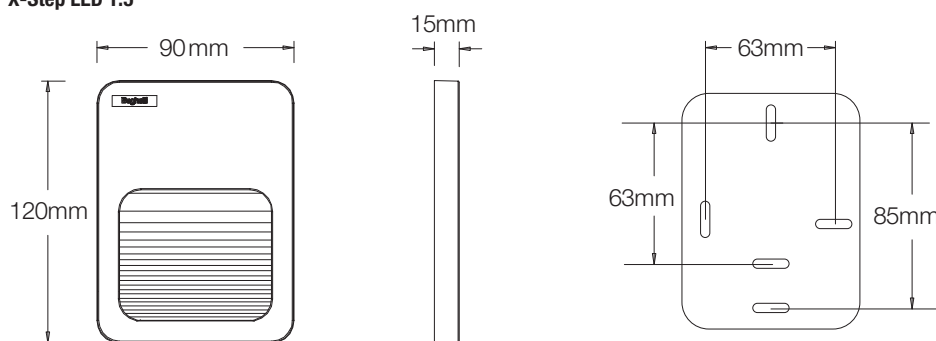

**X-STEP ECOLED**

Code	EAN	W	Candelas	Lum. flux (lm)	Color temp. K	lm/W	Dimensions	CRI	Package sing./min./multipack	EEC
86124	8002219735829	1.5	40	60	3000	40	90x120x15	>80	1/10/80	A+
86125	8002219735836	1.5	40	60	4000	40	90x120x15	>80	1/10/80	A+
86126	8002219735843	1.2	15	30	3000	25	70x50x11.5	>80	1/20/200	A
86127	8002219735850	1.2	15	30	4000	25	70x50x11.5	>80	1/20/200	A