



GENERAL CHARACTERISTICS

- Equivalent Power*** 20 W
- Power supply** 220/240 VAC - 50/60 Hz
- Standard** EN60598-1; EN60598-2-2; EN 62471
- UGR** <25
- Protection grade** IP20
- Working temp.** -10 °C ÷ +40 °C
- Mounting** Recessed, ceiling
- Housing** PC
- Diffuser** PC opal
- Driver** Integrated electronic with CCT selector
- Colour temperature** 3000K, 4000K, 6500K
- Life** 30 000 h ^φ



Recessed ceiling version




Quick mounting bracket for ceiling installation
Switch to select the desired color temperature

X-Six SQ LED


Downlight CCT

Multi-purpose luminaire designed for both recessed and surface mounting. 3 different color temperatures that can be modified using the selector switch on the back of the body. All accessories are included in the packaging.

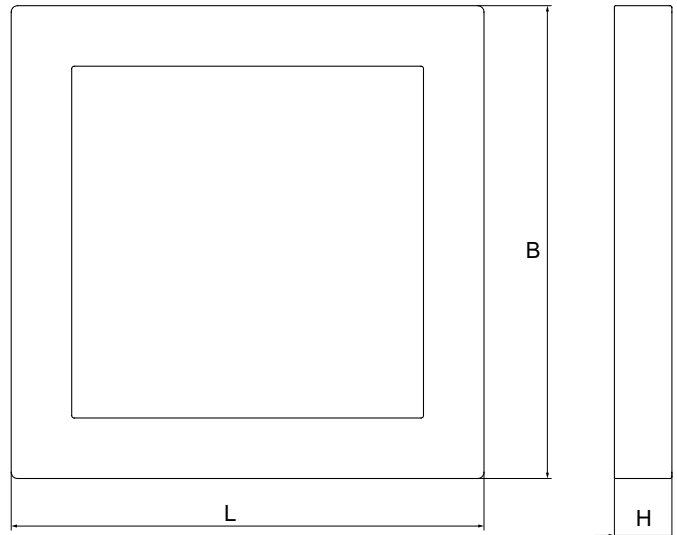

W	• Rozměry (mm) •			Hmotnost kg
	L	B	H	
20	220	220	35	0,5

**X-Six LED 20W REPLACES
COMPACT FLUORESCENT
FIXTURES
2x15W**

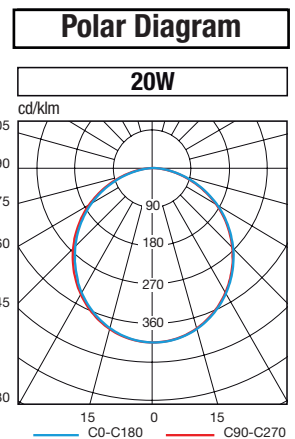

X-Six SQ LED

W	Code	Description	EAN	Power W	N° LED	Colour Temp. K	CRI	Flux of LED (lm)	Flux of fixture (lm)	lm/W	Energy Class	Package
20	71061	X-SIX.SQ.LED.CCT.20W	8002219752352	20	104	3000/4000/6500K	>80	2100	1600	80	A++	1/20