




Micro Dot

MICRODOT CT GL SA/SE IP65

High-performance emergency lighting spotlight with three interchangeable lenses for different light beams.





Control system CT

Order code 19717

EAN 8002219905482



Technical specifications

Supply voltage type	AC
Nominal voltage (AC)	230 Vac
Absorbed SE (max)	4.7 W
Control system	CT
Autonomy	1h, 1.5h, 2h, 3h, 8h
Battery included	Yes
Battery type	LiFe
Battery	2x LiFe 3.2V 1.5Ah
Charging time	12 h
Autonomy test time	60 min
Autonomy test frequency	182 days
Test frequency	28 days
Ambient temperature (min)	0 °C
Ambient temperature (max)	40 °C
Insulation class	II
CCT light tone	4000 K
Optical protection grade	IP65
LED number	1
Photobiological risk	RG0
Colour trim	White RAL 9010
CRI color rendering	>70
Diameter	37 mm
Operation mode	NM/M/PS
Flux SA	220 lm
Flux SE	650 lm, 650 lm, 500 lm, 350 lm, 140 lm
Frequency (max)	60 Hz
Frequency (min)	50 Hz
Power factor	0.45
Glow wire strength	850 °C - 30s.
Light sensor	Yes
Lens efficiency	90%, 88%
Mounting	False Ceiling Recessed
Number of Batteries	2
Rest mode	Yes
Trim material	Polycarbonate
Voltage supply range (max)	253 V
Voltage supply range (min)	207 V

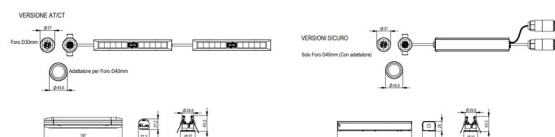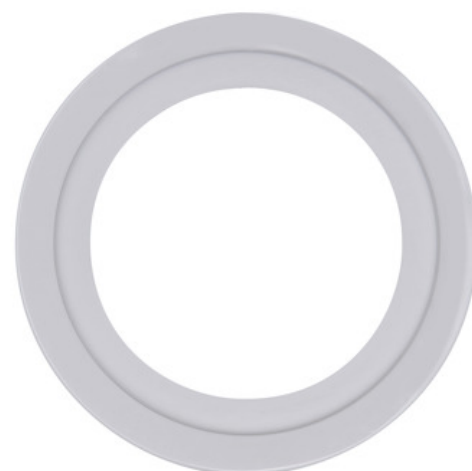

Installation and applications

Environment	Offices
Application	Offices, Public Areas, Shops
Mechanical specifications	
Height	40 mm
Weight	0.23 Kg
Cutout length	30 mm
Body material	Polycarbonate
Colour housing	White RAL 9010
Lens material	Transparent polycarbonate
Box protection grade	IP20
Protection grade IP	IP65/IP20
Protection grade IK	IK07



Certifications and norms


UK SI 2021 No. 1095, EN 62471:2008, EN IEC 60598-1:2021, EN 60598-2-22:2014 + AC:2015 + AC:2016-05 + AC:2016-09 + A1:2020, EN IEC 63000:2018, EN 62493:2010, EN 61000-3-3:2013, REG. 2019/2020(EU), EN IEC 55015:2019 + A11:2020, EN IEC 61000-3-2 :2019

Accessories




15037
MODULO LGFM

Inverter accessories



15079
MODULO LG SLIM



15080
MODULO DALI SLIM