




Micro Dot

MICRODOT AT GL SA/SE IP65 RM

High-performance emergency lighting spotlight with three interchangeable lenses for different light beams.







Control system AT

Order code 19719

EAN 8002219909282

Technical specifications

Supply voltage type	AC
Nominal voltage (AC)	230 Vac
Absorbed SE (max)	4.7 W
Control system	AT
Autonomy	1h, 1.5h, 2h, 3h, 8h
Battery included	Yes
Battery type	LiFe
Battery	2x LiFe 3.2V 1.5Ah
Charging time	12 h
Autonomy test time	60 min
Autonomy test frequency	182 days
Test frequency	28 days
Ambient temperature (min)	0 °C
Ambient temperature (max)	40 °C
Insulation class	II
CCT light tone	4000 K
Optical protection grade	IP42
LED number	1
Photobiological risk	RG0
Colour trim	White RAL 9010
CRI color rendering	>70
Diameter	37 mm
Operation mode	NM/M/PS
Equivalent power	24W
Flux SA	220 lm
Flux SE	650 lm, 650 lm, 500 lm, 350 lm, 130 lm
Frequency (max)	60 Hz
Frequency (min)	50 Hz
Power factor	0.45
Glow wire strength	850 °C - 30s.
Light sensor	Yes
Lens efficiency	87%, 92%, 85%
Mounting	False Ceiling Recessed
Number of Batteries	2
Rest mode	Yes
Trim material	Polycarbonate
Voltage supply range (max)	253 V

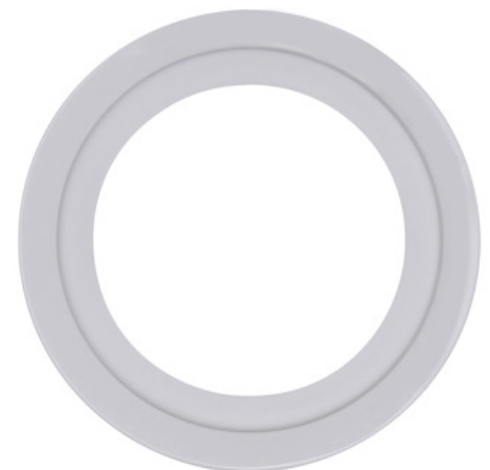

Voltage supply range (min)	207 V
----------------------------	--------------

Installation and applications

Environment	Offices
Application	Offices, Public Areas, Shops

Mechanical specifications

Height	40 mm
Weight	0.4 Kg
Cutout length	60 mm
Body material	Polycarbonate
Colour housing	White RAL 9010
Lens material	Transparent polycarbonate
Box protection grade	IP20
Protection grade IP	IP65/IP20
Protection grade IK	IK07

Certifications and norms

UK SI 2021 No. 1095, EN 62471:2008, EN IEC 60598-1:2021, EN 60598-2-2:2012, EN 60598-2-22:2014 + AC:2015 + AC:2016-05 + AC:2016-09 + A1:2020, EN IEC 63000:2018, EN 62493:2010, EN 61000-3-3:2013, REG. 2019/2020(EU), EN IEC 55015:2019 + A11:2020

Accessories



2730
INIBIT 973 COMANDO R.MODE