



BS UNO Modula



BS UNO MODULA RD 60W 3K CT

Control system CT
Order code 41302CT



Technical specifications

Absorbed Power	60 W, 51 W, 43 W, 34 W
Nominal voltage (AC)	230 Vac
Control system	CT
Autonomy	1h, 1.5h, 2h, 3h, 8h
Battery included	Yes
Battery type	LiFe
Battery	LiFe 6.4V 1.5Ah
Charging time	12 h
Autonomy test time	60 min
Autonomy test frequency	182 days
Test frequency	28 days
Ambient temperature (min)	0 °C
Ambient temperature (max)	40 °C
Insulation class	II
CCT light tone	3000 K
LED number	240
Out current (Qty max)	350
Photobiological risk	RG0
Colour consistency	SDCM3
Colour reflector	White
CRI color rendering	>80
Driver type	RD
Efficiency	158 lm/W, 157 lm/W, 166 lm/W, 166 lm/W
Operation mode	NM/M
Energy class	D
Flux SE	1000 lm, 750 lm, 500 lm, 350 lm, 125 lm
Glow wire strength	850 °C - 30s.
HACCP	Yes
Luminaire flux	9500 lm, 8075 lm, 7125 lm, 5700 lm
Luminous flux L70B50	170000 h
Luminous flux L80B10	95000 h
Luminous flux L80B20	100000 h
Luminous flux L90B10	45000 h
Mounting	Ceiling
Number of Batteries	1
Breaker B10 (Qty max)	15
Breaker B16 (Qty max)	24
Breaker C10 (Qty max)	15

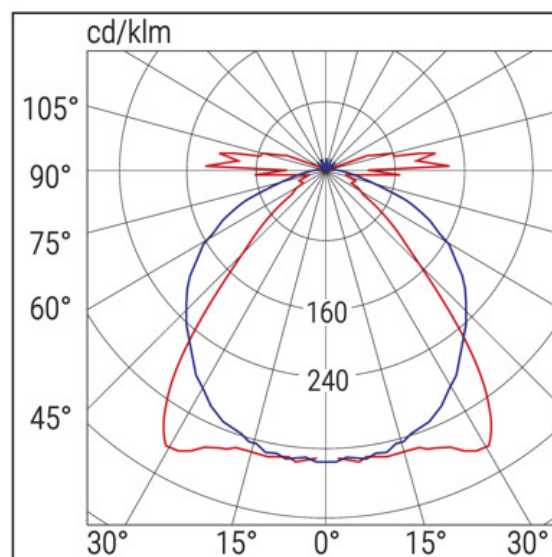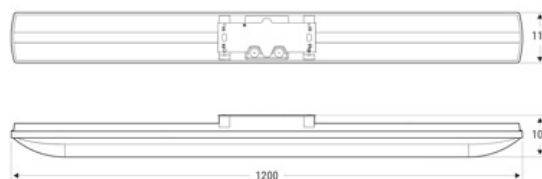

Breaker C16 (Qty max)	24
Voltage supply range (max)	264 V
Voltage supply range (min)	198 V

Installation and applications

Environment	Secondary Areas
Application	Industrial Areas, Production, Warehouses


Mechanical specifications

Height	100 mm
Length	1200 mm
Width	118 mm
Body material	Polycarbonate
Colour housing	Grey RAL 7040
Cover material	Transparent polycarbonate
Diffuser finiture	Clear
Reflector material	White Lacquered Aluminium
Protection grade IP	IP66
Protection grade IK	IK07


Certifications and norms

UK SI 2021 No. 1095, EN 62471:2008, EN IEC 60598-1:2021, EN 60598-2-22:2014 + AC:2015 + AC:2016-05 + AC:2016-09 + A1:2020, EN IEC 63000:2018, EN 62493:2010, EN 61000-3-3:2013, REG. 2019/2020(EU), EN IEC 55015:2019 + A11:2020, EN IEC 61000-3-2 :2019

Accessories



8063/1
GR STAFFA UNICA GRIGLIA
8063



8063
BS100 GRIGLIA PROTEZ
36/58W


Inverter accessories



15079
MODULO LG SLIM



15037
MODULO LGFM



RA13
BOOSTER BAT LiFe 6.4V 1.5Ah



15080
MODULO DALI SLIM