



BS UNO Modula

BS UNO MODULA RD 60W 3K


Order code **41302**

EAN 8002219894489

CE

Technical specifications

Absorbed Power	60 W, 50 W, 43 W, 34 W
Nominal voltage (AC)	230 Vac
Ambient temperature (min)	-20 °C
Ambient temperature (max)	40 °C
Insulation class	II
CCT light tone	3000 K
LED number	240
Out current (Qty max)	350
Photobiological risk	RG0
Colour consistency	SDCM3
Colour reflector	White
CRI color rendering	>80
Driver type	RD
Efficiency	158 lm/W, 162 lm/W, 163 lm/W, 165 lm/W
Energy class	D
Frequency (max)	60 Hz
Frequency (min)	50 Hz
Glow wire strength	850 °C - 30s.
HACCP	Yes
Luminaire flux	9500 lm, 8075 lm, 7030 lm, 5605 lm
Luminous flux L70B50	170000 h
Luminous flux L80B10	95000 h
Luminous flux L80B20	100000 h
Luminous flux L90B10	45000 h
Mounting	Ceiling
Breaker B10 (Qty max)	15
Breaker B16 (Qty max)	24
Breaker C10 (Qty max)	15
Breaker C16 (Qty max)	24
Voltage supply range (max)	264 V
Voltage supply range (min)	198 V

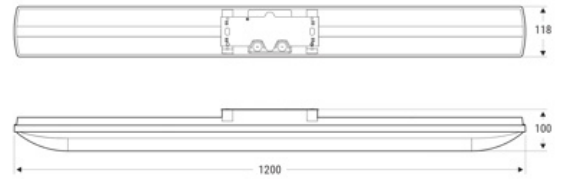


Installation and applications


Environment	Secondary Areas
Application	Industrial Areas, Production, Warehouses

Mechanical specifications

Height	100 mm
Length	1200 mm
Width	118 mm
Weight	1.9 Kg
Body material	Polycarbonate
Colour housing	Grey RAL 7040
Cover material	Transparent polycarbonate
Diffuser finiture	Clear
Reflector material	White Lacquered Aluminium
Protection grade IP	IP66

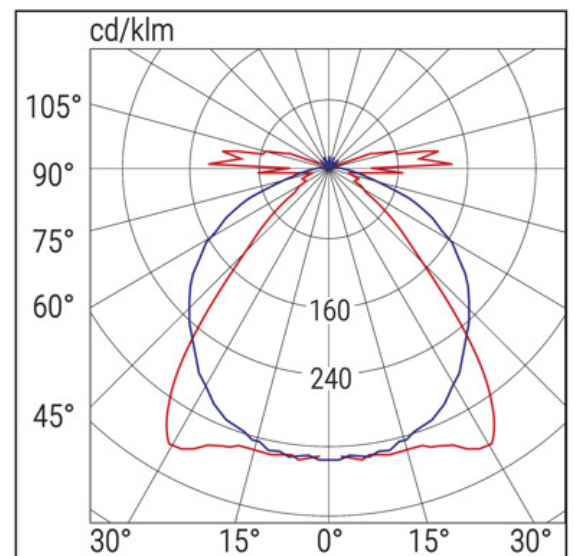

Accessories



8063
BS100 GRIGLIA PROTEZ
36/58W



8063/1
GR STAFFA UNICA GRIGLIA
8063


Inverter accessories



15075
MODULO EPS



15060
MODULO LG230



15059
MODULO LG24



15068
MODULO TR 6W 1/3H BS UNO