



Saving Slim


SAVING SLIM 120 IP65 38W 6.5K

Order code **75467**

EAN 8002219895608

Technical specifications

Absorbed Power	38 W
Supply voltage type	AC
Nominal voltage (AC)	230 Vac
Ambient temperature (min)	-20 °C
Ambient temperature (max)	40 °C
Insulation class	I
CCT light tone	6500 K
LED number	126
Colour consistency	SDCM5
CRI color rendering	>80
Ballast	For constant current LED
Efficiency	110 lm/W
Energy class	E
Equivalent power	2x36w
Frequency (max)	60 Hz
Frequency (min)	50 Hz
Power factor	0.9
Glow wire strength	550 °C - 30s.
MTBF driver	25000 h
Luminaire flux	4180 lm
Mounting	Ceiling
Voltage supply range (max)	240 V
Voltage supply range (min)	220 V

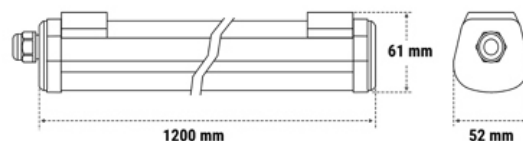


Installation and applications

Environment	Secondary Areas
Application	Offices, Production, Warehouses

Mechanical specifications

Height	70 mm
Length	1273 mm
Width	85 mm
Weight	1.5 Kg
Colour housing	Grey RAL 7040
Protection grade IP	IP65
Protection grade IK	IK07

Certifications and norms

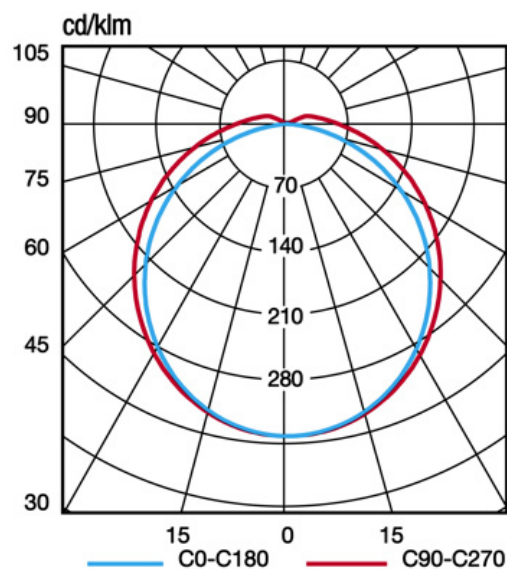

UK SI 2021 No. 1095, EN 62471:2008, EN IEC 60598-1:2021, EN 60598-2-1:1989, EN IEC 63000:2018, EN 62493:2010, EN 61000-3-3:2013, REG. 2019/2020(EU), EN IEC 55015:2019 + A11:2020, EN IEC 61000-3-2 :2019

Accessories



201954000
KIT 2 GANCI SOSPEN ST EASY
LED

Inverter accessories



15037
MODULO LGFM



19371
INV P&L LED SE/SA 3H 60-180V



19399
INV UNIV CT/LG/DALI 5W 20-
250V



19398
INV UNIV AT RM 5W 20-250V



19367
INV P&L LED SE/SA 1H 60-180V



RA13
BOOSTER BAT LiFe 6.4V 1.5Ah