



BS100 LED

BS100 LED REG HV M1280 4K





Order code **40004H**

EAN 8002219889225

Technical specifications

Absorbed Power	51 W, 43 W, 35 W, 28 W
Supply voltage type	AC
Nominal voltage (AC)	230 Vac
Ambient temperature (min)	-20 °C
Ambient temperature (max)	40 °C
Insulation class	I
CCT light tone	4000 K
LED number	192
Photobiological risk	RG0
Colour consistency	SDCM3
Colour reflector	White
CRI color rendering	80
Driver type	RD
Ballast	For constant current LED
Efficiency	157 lm/W, 163 lm/W, 171 lm/W, 179 lm/W
Energy class	D
Equivalent power	2x36w
Frequency (max)	60 Hz
Frequency (min)	50 Hz
Power factor	0.98
Glow wire strength	850 °C - 30s.
HACCP	Yes
Inrush current	13.5 A
Inrush time	0.17
Luminaire flux	8000 lm, 7000 lm, 6000 lm, 5000 lm
Luminous flux L80B20	90000 h
Mounting	Wall, Ceiling, Suspension, Electrified rail
Breaker B10 (Qty max)	25
Breaker B16 (Qty max)	40
Breaker C10 (Qty max)	25
Breaker C16 (Qty max)	40
THD	20
Voltage supply range (max)	253 V
Voltage supply range (min)	207 V

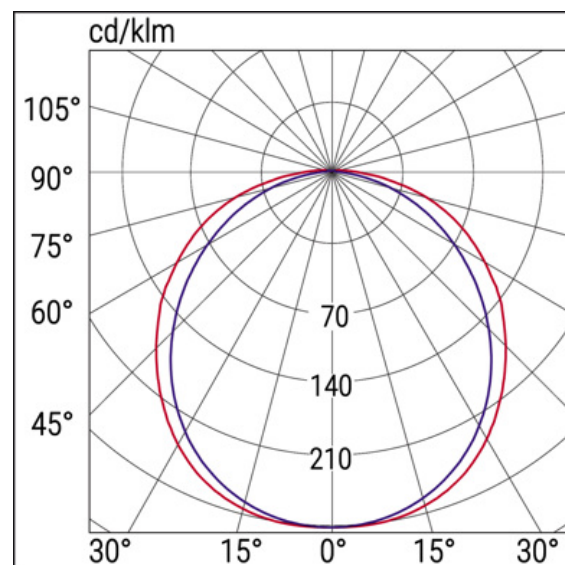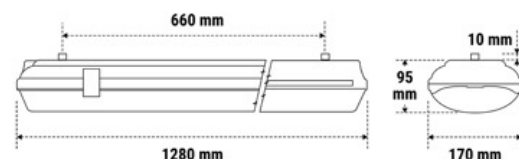

Installation and applications

Environment **Secondary Areas**

Application	Industrial Areas, Production, Warehouses
Mechanical specifications	
Height	95 mm
Length	1280 mm
Width	170 mm
Weight	2.3 Kg
Body material	Polycarbonate
Colour housing	Grey RAL 7040
Cover material	Transparent Photoengraved Polycarbonate
Diffuser finiture	Opale
Reflector material	Specular Aluminium
Protection grade IP	IP65
Protection grade IK	IK07

Certifications and norms

UK SI 2021 No. 1095, EN 62471:2008, EN IEC 60598-1:2021, EN 60598-2-1:1989, EN IEC 63000:2018, EN 62493:2010, EN 61000-3-3:2013, REG. 2019/2020(EU), EN IEC 55015:2019 + A11:2020, EN IEC 61000-3-2 :2019

Accessories



8063/1
GR STAFFA UNICA GRIGLIA
8063



3504
BS100/110 STAFFE A PARETE



3506H
BS100H K.GANCIO ACCIAIO
36W



8063
BS100 GRIGLIA PROTEZ
36/58W

Inverter accessories



19367
INV P&L LED SE/SA 1H 60-180V



RA13
BOOSTER BAT LiFe 6.4V 1.5Ah



19371
INV P&L LED SE/SA 3H 60-180V



15079
MODULO LG SLIM




19398
INV UNIV AT RM 5W 20-240V



19399
INV UNIV CT 5W 20-240V



15037
MODULO LGFM



15080
MODULO DALI SLIM